

**028056**

**SENSOPAC**



**SENS**  **PAC**  
SENSOrimotor structuring of Perception and Action for emerging Cognition

Instrument type: IP

**Publishable Summary**  
**Month 1 to 54**

Period covered: 1st January 2009 to 30<sup>th</sup> June 2010

Date of preparation: March 13, 2011

Start date of project: 1st Jan 2006

Duration: 54 months

Project coordinator name: **ERASMUS**

Document prepared by: **DLR**

## Table of contents

<b>I. Project Execution</b> .....	<b>4</b>
I.1 Summary Description of project objectives .....	5
I.1.1 Project Summary .....	5
I.1.2 Project objectives .....	5
I.2 Project Organisation .....	6
I.1.1 Project organisation .....	6
I.2 Contractors involved .....	6
I.3 Work performed and end results .....	7
I.3.1 WP1 .....	7
WP1 Objectives .....	7
WP1 Results .....	7
I.3.2 WP2/4 .....	12
WP2/4 objectives .....	12
WP2/4 Results .....	12
I.3.3 WP3 .....	15
WP3 objectives .....	16
WP3 Results .....	16
I.3.4 WP5 .....	20
WP5 objectives .....	20
WP5 Results .....	21
I.3.5 WP6 .....	22
WP6 objectives .....	22
WP6 Results .....	22
<b>II. Dissemination and Use</b> .....	<b>24</b>
Publications .....	24
Exploitation .....	36

## SENSOPAC Publishable Summary

# I. Project Execution

The neuroscience part of SENSOPAC targeted a goal that has previously been regarded as unattainable, viz. an executable, biomimetic model of a full functional system of the brain. Because of the overall goal of the SENSOPAC project to generate systems for haptic discrimination, the focus of the neuroscience modelling was the cerebellar C3 zone-anterior interposed system, which is involved in arm-hand control and has an extremely rich representation of skin sensory input from the fingers.

A complete biomimetic model requires knowledge at a wide range of levels, ranging from ion channels, synaptic learning mechanisms to local network connectivity and overall structural organization of input-output connections. All these levels of experimental analysis have been targeted within this project, in many cases with new state-of-the-art techniques developed within the project. The specific issues addressed by the experimentalists have been critical remaining gaps in our understanding of conductance level function and learning mechanisms of the cerebellar neuronal circuitry in general as well as specific aspects of *in vivo* local network connectivity and overall system function of the targeted subsystem. The result of the neuroscience work within the SENSOPAC project was successful in that a biomimetic model of the C3 zone-anterior interposed system, taking into account all aspects of neuronal and neuronal network function down to the contribution of specific types of ion channels, was accomplished.

The Large-Scale Analog Model LSAM features the full model system, which within the SENSOPAC project was used to directly control the DLR robotic system in real-time, and was implemented at the neuronal/neuron bundle level of abstraction. The Event-Driven LookUp Table EDLUT model, featuring simulation of spiking neuronal networks, could be used to simulate parts of the system at a higher level of resolution, for corroborating the function of LSAM down to the conductance level. LSAM connected to the DLR robot provided as output haptics related, integrated sensorimotor signals, which could be extended also to signals related to 'imagination' of objects/properties. In this way, the neuroscience part of SENSOPAC showed that signal processing of the type that naturally occurs within the brain can be highly useful for the design of haptically competent cognitive systems.

We examined active sensing, that is how information can be derived using haptic sensors (touch) in both human and robotic interfaces. The work in humans involved collecting and analysing microneurography (recording of nerve cells) data from humans to understand the fundamental principles involved in haptic sensing. Some notable successes were in the study of a new class of sensory receptors in humans that are based in the fingertip nail wall. We found that they responded reliably to forces applied to the fingertips representative for those that occur in object manipulation and exploration tasks. Furthermore, signals in populations of the neurons contain directional information about fingertip forces. That is, force direction reliably influenced the responses in nearly all the afferents and the preferred direction to tangential force components was distributed in all angular directions across afferents. We conclude that signals in the population of receptors contain vectorial information about fingertip forces and signal tactile features of contacted surfaces while being less influenced by textural information. Linked to these human studies were a range of computational studies that elucidated how the brain could decode spatiotemporal (spiking) data from the receptors for discrimination. We concluded that stimulus history affects both spike counts and first spike latencies. Some afferents even transmit high information about stimulation in their first spike latencies. An analysis of latency tuning curves confirms that those

afferents respond to past stimulation only, independently of current ongoing stimulation. In addition a new type of artificial haptic sensor has been developed.

An important result of SENSOPAC was the transfer of the neuroscience and haptic results to robotic systems. To this end, a novel, variable-impedance robotic hand-arm-hand system was developed for integration within the project. This DLR Hand-Arm System is a robotic system mimicking the kinematic, dynamic and force properties of the human arm using modern mechatronic technologies. It is based on a variable stiffness drive concept with joint structures as close to the biological counterpart as possible.

The system is designed as a fully integrated hand- arm system that no longer allows the isolated use of the hand or arm. Nevertheless it still can be logically divided into a forearm and hand, including the wrist, on one side, and the arm consisting of a 3-DoF shoulder and a 2-DoF elbow, on the other. The requirements of the hand and arm are quite different. For example, vibration damping is of no relevance for the fingers (finger dynamics are negligible in relation to the applied forces), whereas a good vibration damping performance of the arm, especially in the shoulder, is crucial for the whole hand-arm system. Therefore the design aspects must be separately analysed for both systems.

Compliance to cerebellar control was a key aspect in this system, for instance with respect to the hand kinematics. Within SENSOPAC, a detailed model of the human hand has been realised and results thereof integrated in the robotic system.

## **I.1 Summary Description of project objectives**

### **I.1.1 Project Summary**

The SENSOPAC project combines machine learning techniques and modelling of biological systems to develop a machine capable of abstracting cognitive notions from sensorimotor relationships during interactions with its environment, and of generalising this knowledge to novel situations. The machine, through data-driven methods, aims to discover the sensorimotor relationships and consequently learn the intrinsic structure of predictive and causal relationships that govern movement systems. Detailed neural models of key brain areas will be embedded into functional models of perception, decision making, planning and control, effectively bridging and contributing to Neuroscience and Engineering.

A systematic and integrated approach to studying active sensing and motor control in animals in a hierarchy of defined tasks offered insights into skilled behaviour lead to fruitful applications of bio-inspired mechanisms for perception and intelligent control. Throughout the project, continuous interactions between experimentalists, theoreticians, engineers and roboticists have taken place in order to coordinate the most rigorous development and testing of a complete artificial cognitive system.

### **I.1.2 Project objectives**

The overall aims of the SENSOPAC project are to:

- Understand the sensorimotor foundation of perception and cognition
- Improve our understanding of the neurobiological substrate for action-perception systems
- Build a physical system for haptic cognition
- Develop methodologies to investigate cognition in the brain.

Within these five overall aims, SENSOPAC has two classes of intermediate specific aims. One class is organised around the key problems identified as central to the goal of building a machine to extract and apply cognitive notions from sensorimotor

interactions. Each problem-specific aim is tackled through a balanced mix of biological and non-biological approaches to produce biologically inspired deliverables.


A class of solution-specific aims, which investigate existing biological solutions and build an artificial haptic solution, complements these problem-specific aims. These solution-specific aims provide common resources to tackle the five key problems, providing neural models and a biologically relevant system in which to test results.

The identification of problem-specific aims is the cornerstone of our approach to building a focused collaboration. The identification of a problem provides the common context or common language necessary to integrate the efforts of a diverse group of experts, from the fields of biology, biophysical and systems modelling, machine learning, robots and hardware and software engineering. This level of integration is essential if the engineering of neural systems is to make significant contributions to either the engineering or to the biology.

## I.2 Project Organisation

The SENSOPAC project was organized in workpackages with specific tasks related to the management (WP0), knowledge distribution (WP7) or scientific and technical developments (WP1-WP6). Most of the WPs were guided by single WP-leaders, and the overall scientific supervision was led by the Scientific Board, which was comprised of the participants from DLR (scientific coordinator), PAVIA, and UEDIN. The daily management supervision and financial reporting were done by Erasmus and ALMA, respectively. General scientific and organisational project coordination was done by DLR. Communication was warranted by many mutual lab visits, numerous emails, common website programs, and scientific symposia.

### I.1.1 Project organisation

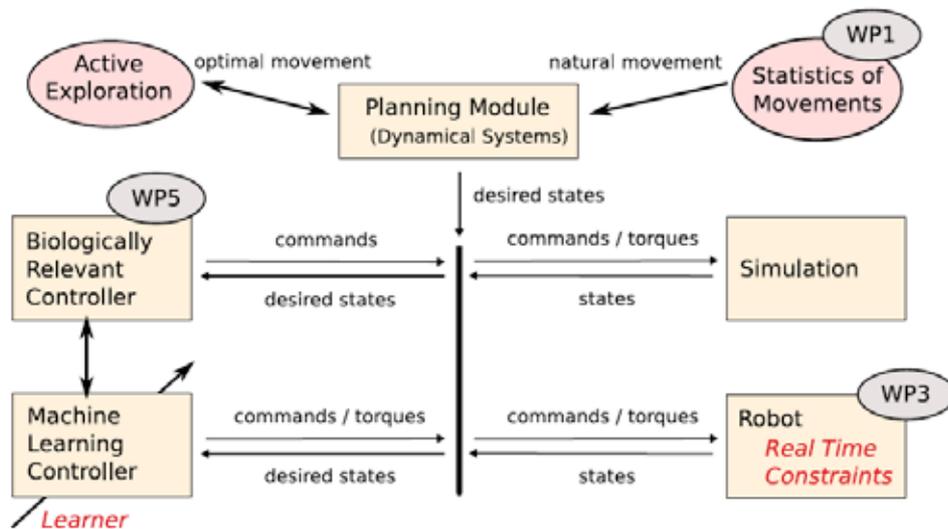

### I.1.2 Contractors involved

Participant. Role*	Participant. Number	Participant name	Participant short name	Country	Date enter project	Date exit project
CO	1	Erasmus Universitair	ERASMUS	Netherlands	M1	M54

		Medisch Centrum				
CR	2	Sony France SA	SONY	France	M1	M24
SC	3	Deutsches Zentrum für Luft- und Raumfahrt	DLR	Germany	M1	M54
CR	4	Altjira SA	ALTJIRA	Switzerland	M1	M54
CR	5	Dipartimento di Scienze Fisiologiche-Farmacologiche Cellulari-Molecolari - Università degli Studi di Pavia	PAVIA	Italy	M1	M54
CR	6	Umeå Universitet	UMEA	Sweden	M1	M54
CR	7	Lund Universitet	LUND	Sweden	M1	M54
CR	8	Universidadde Granada	UGR	Spain	M1	M54
CR	9	University of Edinburgh	UEDIN	UK	M1	M54
CR	10	University of Cambridge	UCAM-DENG	UK	M1	M54
CR	11	Bar-Ilan University	BIU	Israel	M1	M54
CR	12	Alma Consulting Group SAS	ALMA	France	M1	M54
CR	13	Université Pierre et Marie Curie	UPMC	France	M21	M54

\*CO = Coordinator

SC = Scientific coordinator

CR = Contractor

## I.3 Work performed and end results

### I.1.3 WP1

**Leader:** UCAM - DENG

**Participants:** UCAM, UPMC, DLR, UMEA, UEDIN

#### WP1 Objectives

This WP examines active sensing, that is how information can be derived using haptic sensors (touch) in both human and robotic interfaces. The work in humans involved collecting and analysing microneurography (recording of nerve cells) data from humans to understand the fundamental principles involved in haptic sensing. Its aim is also examining behavioural data to understand what haptic cues we are sensitive to when manipulating novel objects. In addition a new type of artificial haptic sensor has been developed. Understanding the basis of haptic sensing is fundamental for being able to reproduce this behaviour in artificial systems.

#### WP1 Results

##### Microneurography of human touch

We examined the function of the clusters of slowly adapting (SA-II) mechanoreceptors in nail walls. We found that they responded reliably to forces applied to the fingertips representative for those that occur in object manipulation and exploration tasks. Furthermore, signals in populations of the neurons contain directional information about fingertip forces. That is, force direction reliably influenced the responses in nearly all the afferents and the preferred direction to tangential force components was distributed in all angular directions across afferents. We conclude that signals in the population of SA-II afferents terminating in the nail walls contain vectorial information about fingertip forces. The particular tactile features of contacted surfaces would less influence force-related signals in SA-II afferents than force-related signals present in afferents terminating in the volar skin areas that directly contact objects. It is well known that the nails are important for performing fine manipulation and haptic tasks. For example, a finger without a nail will compromise a musician's career if the finger involved is necessary to play a note (strings, keyboards) or hold a position (winds). Our findings provide, for the first time, a rationale for the sensory impairment after nail-related injury and generate several novel and testable hypotheses for experimental studies striving to unravel the roles of the SA-II afferents for the functions of the hands.

#### **Inter- vs. intradigit integration of haptic information**

We have performed haptic discrimination experiments that address the capacity of humans to integrate spatiotemporal information across multiple fingertips and how this might depend on the types of tactile afferents primarily engaged. To explore computational characteristics of tactile processing, we quantified humans' capacity to discriminate temporal tactile features contained in two stimuli delivered to either the tip of a single digit or to different digits belonging to the same and different hands. In addition to supporting the notion of hierarchical schemes for information processing in the somatosensory system, our results bring forth new views on how the functional organization of the system is tailored to natural use of hands. The capacity to detect correlated tactile events shows a considerably higher temporal resolution for stimuli received by a single fingertip than when received by different digits. The lower temporal bandwidth for detecting correlated tactile events across digits of the same hand matches the fact that such events are naturally coordinated by the rather slow motor system. This also agrees with neurophysiological evidence that compilation of the information across digit occurs in separate maps downstream the digit-specific maps. The capacity to detect correlated tactile events across digits of the different hands shows an even lower temporal bandwidth than observed across digits of the same hand and seems to be supported primarily by inputs provided by slowly adapting tactile afferents.

#### **Decoding of spatiotemporal (spiking) haptic data for discrimination**

In this computational investigation, we examined how information about tactile stimuli is represented in the firing statistics of tactile afferents. We concluded that stimulus history affects spike counts and first spike latencies. Some afferents transmit high information about past stimulation in their first spike latencies. An analysis of latency tuning curves confirms that those afferents respond to past stimulation only, independently of current ongoing stimulation. This might be explained by afferents responding to the state of the skin at the start of stimulation. Through this mechanism, tactile afferents could signal an 'offset signal' that could be used in order to mitigate otherwise confounding hysteresis effects.

#### **Performing active haptic sensing with spiking neural network models**


This study examined temporal coding mechanisms mediating the transmission of spiking tactile signals along the somatosensory pathway (Brasselet, Johansson & Arleo, 2009; Brasselet & Arleo 2010; Brasselet, Johansson & Arleo, 2011a,b). We investigated the working hypothesis that Cuneate Nucleus (CN) neurones may mediate efficient encoding

–in terms of both fast and reliable information transfer– of the afferent signals propagating from the fingertip through the peripheral nerve fibres. The main rationale of this research was that the CN network would not constitute a mere synaptic relay, but it would rather convey optimal contextual accounts of tactile inputs to the central nervous system. The outcomes of this research corroborated this hypothesis, and predicted a relevant role for 2<sup>nd</sup> CN neurons in facilitating fast discrimination of haptic contexts, minimising destructive interference over lifelong learning, and maximising associative capacity for somatosensory memories.

**Development of touch sensors**

At DLR different generations of tactile sensors, have been investigated during the SENSOPAC project.


The sensing principle of the first generation is based on the formation of conductive pathways in piezo-resistive flexible materials. If pressure is applied to such materials the volume resistivity decreases. To enable the utilisation as tactile sensors sensitive areas, so called taxels have to be created. The first generation uses metal readout wires to connect the taxels. One of the major goals was the reduction of the number of readout wires to enable the integration of the tactile sensor into robotic hands.

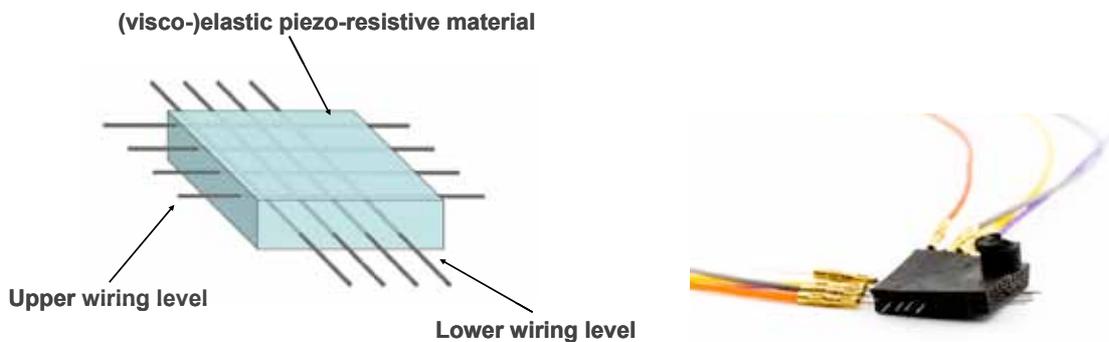

**Figure 1: First Generation DLR touch sensor**


Therefore an array setup was chosen to connect the taxels. The crossing wires, shown in the above figure, form sensitive taxels at every crossing point. The first generation of piezoresistive sensor patches provide:

- 25 taxels
- a sensitive surface of 6mm x 6mm
- a resolution of about 1mm<sup>2</sup>
- reduced number of readout wires (10)

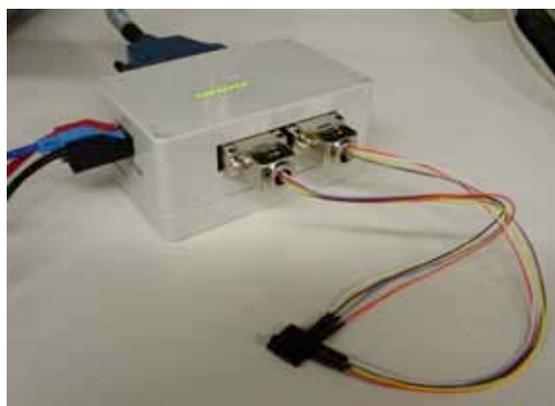

**Figure 2: Touch sensor readout**

Along with the sensor patches DLR provided the partners with complete readout systems. These readout systems consist of sensor patches, specially designed and manufactured pre-amplification boards, DAQ-cards and software. Using identical readout systems ensures the future comparability of the results obtained by the different partners. Tests of the sensor patches showed, that the sensor allows for the discrimination of different objects which were applied to the sensor patch surface. The below figure demonstrates the results of these indentation tests.

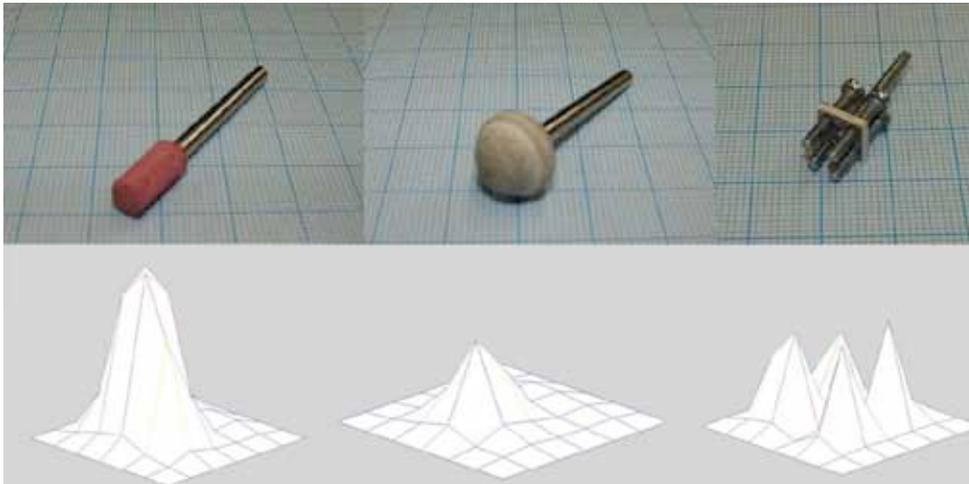

**Figure 3: Indenting the DLR tactile sensor. The below graphs shows the measured voltages when indented with the above probes.**


Although the first generation sensor patches worked well, alternative approaches towards the sensor hardware have been pursued. Of special interest was the reduction of complexity regarding the setup of the sensor patches themselves and the applied manufacturing process.

As an alternative sensor setup a sensor based on polymer wires has been investigated. The sensitive area consists of conductive wires which are coated with a flexible conductive material. To increase the sensitivity of the sensor patches an alternative transduction principle has been investigated. In contrast to the first generation sensor principle, the coated wire sensor uses the varying transition resistivity between two crossed wires. The transition resistivity depends on the contact surface between the coated wires. As the coating consists of flexible conductive material the contact surface increases if two crossing wires are pressed against each other.

To enable the evaluation of different sensing principles as well as the manufactured tactile sensors a specialised test bed has been set up at DLR. This testbed allows for repeatable indentation of sensor patches and thus enables objective evaluation of different materials and sensor setups. The testbed consists of a non-backdriveable linear motor for the indentation in z-direction and positioning boards for the deviation in x- and y-direction. To measure the applied forces a 6-DoF force-torque sensor is applied.

During the conducted research three basic challenges for the development of tactile sensors have been identified:


- the piezoresistive properties of the applied polymers.
- the encapsulation of the conductive / piezoresistive polymer with an insulating polymer material.
- the mechanical and electrical connection of the conductive polymer to standard electronics elements and PCBs.

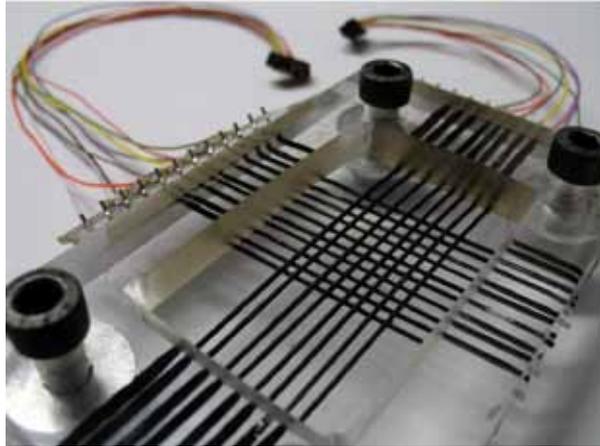

**Figure 5: Prototype of the coated wire sensor**

The investigated Coated Polymer Wire Setup approach based on polymeric core materials showed that the application of a piezoresistive polymer coating over a conductive polymer core did not generate an advantage over an approach based on an uncoated conductive polymer core. Based on the results of the examination of the coated-wire setups the decision was made to focus on this approach and optimize the mechanical setup and here especially the fixation of the polymer wires in the required geometric placement. The challenge of the electrical and mechanical connection of the elastic polymers and the standard readout electronics circuitry could be met applying floating contacting islands on an elastic polymer film. The basic idea of this approach is the geometric separation of the mechanical contact point from the electrical contact point. The ultimate goal was to free the electrical contacting area from any mechanical stress.

The overall setup results from the evaluation of the different sensor setups that have been evaluated during the SENSOPAC project: Measurement of the change of the transition resistance rather than to try to measure the changes within a solid volume of piezoresistive polymer is a more promising approach towards stretchable tactile sensors.

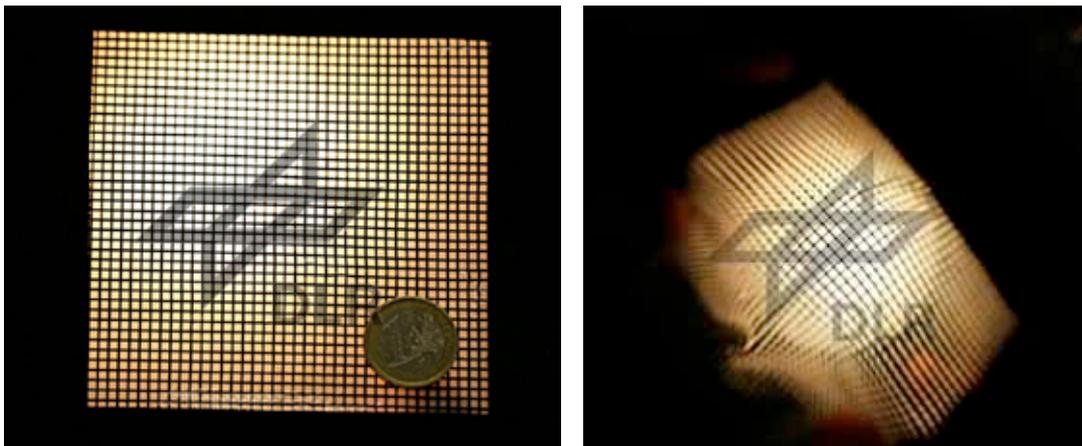

**Figure 6: left: DLR tactile sensor; right: wrapped around a light bulb**

The sensor setup is applied on an elastic support structure resembling the human skin. As the sensitive area is completely free of rigid parts and is based on an all-polymer approach it can be stretched and is able to cover 3D-freeform surfaces.

As the result of the research towards new tactile sensors which has been conducted during SENSOPAC we were able to realize a tactile sensor that exhibits a sensitive area of 100x100mm with 40 rows x 40 columns resulting in 1600 taxels with a spacing

between the taxels of 2.5mm in x- and y-direction. The minimal required offset force required to generate an output signal is currently 0.15 N.

#### **Decoding of spatiotemporal readouts from artificial skin**

We characterised the response properties of an artificial skin prototype suitable for *dynamical* fine touch discrimination, i.e. capable of sensing Braille-like indentation patterns applied at relatively large speeds (~50mm/s). These speeds are compatible to those adopted by expert Braille readers. We studied a bio-mimetic framework for the encoding/decoding of artificial tactile signals (Bologna LL et al, 2009; 2010a,b).. Analogue data from the artificial fingertip were encoded through a network of leaky integrate-and-fire neurons, whose spike train outputs were then decoded on the basis of the metrical information. This research aimed at favouring fast and optimal discrimination of Braille-like stimulation patterns. We corroborated the approach based on temporal neural coding, i.e. based on the relative latencies of spikes, to study tactile sensing in robotics.

### **I.1.4 WP2/4**

**Leader:** UEDIN

**Participants:** UEDIN, UGR, UCAM - DENG, DLR, UPMC, LUND

#### **WP2/4 objectives**

WP2/4 forms the backbone of the statistical machine learning and cerebellar modelling work, where basic tools to both exploit natural dynamics and physics are developed. Furthermore, algorithms and methods are set up for use in the real time adaptive control (and through it) active haptic discrimination of complex object properties such as inertial parameters, mass density and texture. This workpackage has four distinct domains of contribution: Task 2A dealt with exploiting analytical relationship between the action-sensing loop, i.e., use the knowledge of physics (linearity between dynamic models under certain conditions etc.) and methods of exploiting this in incremental manner. Task 2B dealt with algorithms and models for incremental learning of sensorimotor relationships, both from a nonparametric, statistical formulation and from a cerebellar modelling standpoint. Task 2C mainly dealt with identifying, learning and representing multiple context dynamics and furthermore, learning to switch between them seamlessly. This is important not only for control but for haptic discrimination during manipulation. Task 2D was about analyzing efficient representations of continuous/discrete context variables and latent spaces such that concepts can be generalised. This has dealt with both dynamic properties of movement as well as the associated haptic sensory feedback. In addition, these representations were used to

#### **WP2/4 Results**


##### **Learning the sensorimotor structure in high dimensions**

The ability to learn sensorimotor structures is a key to compliant control of robots in a wide range of environments or tasks. Using learning, inaccurate and un-modelled components of analytical model based dynamics can be compensated for, and furthermore the learnt mappings can include sensory inputs such as haptic data, possibly yielding complex but useful sensorimotor contingencies automatically. The application of learning in control however poses special requirements to the algorithms, in particular with respect to computational efficiency, the ability to handle high dimensional data, and the facility to train models in an online, incremental fashion. Furthermore, adopting an engineering attitude we can explore biologically plausible approaches to study strategies that biological systems might have developed to address these issues.

Within WP2, learning is studied mainly from the following three viewpoints:

- 1) We developed statistical machine learning approaches that meet the aforementioned requirements (mainly at UEDIN).
- 2) We worked on biologically plausible approaches like cerebellar spiking neural networks (mainly at UGR) (Luque, N.R. et al., 2011a), (Luque, N.R. et al., 2011b).
- 3) We studied where and how to integrate learnt models in a control loop, e.g., in feedforward or recurrent architectures (Luque, N.R. et al., 2011c). (Tolu, S. et al. 2011a).

**UEDIN** has produced a new implementation of the online learning algorithm Locally Weighted Projection Regression (LWPR). While the algorithm itself had already been proven to be suitable for learning high-dimensional function mappings, previous implementations were either slow (written in pure MATLAB) or rather inconvenient to use. The new implementation uses an efficient low-level core library written in C, but it provides bindings and wrappers for usage from C++, MATLAB/Octave, and Python on multiple platforms, thus making its integration into existing software environments (e.g., the simulator developed at **DLR**) much easier. The software package, together with documentation and tutorials, has been made publicly available, and an accompanying paper has been published in the *JMLR* track on machine learning open source software. **UEDIN** has also set up a website for the LWPR implementation, where the documentation and tutorials can be browsed online (<http://www.ipab.inf.ed.ac.uk/slmc/software/lwpr>).

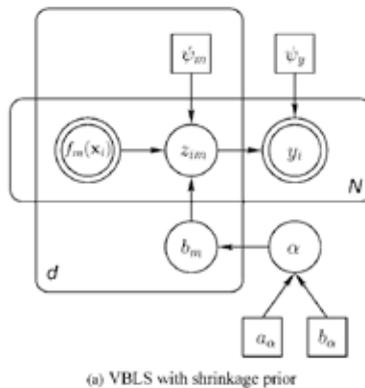

**Figure 7: Graphical model of VBLS with shrinkage prior**

Further, in response to the open question of automatic selection of local complexity parameter in non-linear regression, UEDIN has explored automatic selection of kernel width and dimensionality of local models (Ting, D'Souza, Vijayakumar, & Schaal, 2010) with a potential to scale to high dimensional problems.

**Managing sensorimotor structures in multiple contexts**

UCAM has worked on evaluating human performance in learning object dynamics and have examined both the representation of object dynamics and how adaptive control can be integrated with optimal feedback control. Results show that subjects could immediately anticipate the force direction for each orientation of the tool based on its visual geometry, and with experience, they learned to parameterize the force magnitude. Surprisingly, this parameterization of force magnitude showed limited generalization when the orientation of the tool changed. Had subjects parameterized a single general representation, full generalization would be expected. Thus, our results suggest that object dynamics are captured by multiple representations, each of which

encodes the mapping associated with a specific grasp context. We suggest that the concept of grasp-specific representations may provide a unifying framework for interpreting previous results related to dynamics learning. This work is now published as two papers. The first describes the novel robotic interface: (Howard, Ingram, & Wolpert, 2009). And the second the full experiment and results: (Ingram, Howard, Flanagan, & Wolpert, 2010).

UCAM also showed that in the presence of an unpredictable task (one in which there is a visuomotor rotation that changes for each movement) that the motor system initially generates highly variable behaviour but eventually converges to stereo-typed patterns of adaptive responses predicted by a simple optimality principle. These results suggest that adaptation can become specifically tuned to identify task-specific parameters in an optimal manner. We developed a novel model that incorporates both adaptive control and estimation of task parameters to simulate behaviour (Braun, Aertsen, Wolpert, & Mehring, 2009).

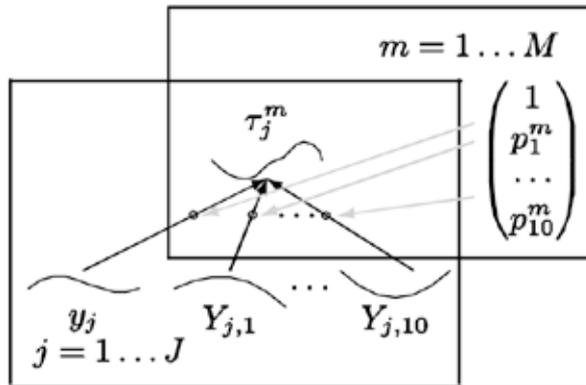


Figure 8: Multi-task GP model

At UEDIN, we have extended our methods to incorporate analytical properties of dynamics contexts into learning algorithms. In particular, we investigated how to learn the inverse dynamics mapping of a robot arm for multiple loads using a single multi-task Gaussian Process regression model. The new multi-task GP approach now explicitly exploits the fact that the underlying nonlinearities  $Z(\dots)$  are the same for all contexts, and models the torques with a single covariance function that factorises in the same way as the  $Z^*r$  decomposition above. Therefore, all training data from all contexts can be collected in a single model, and uncertainty can be shared amongst the contexts. Indeed, since the multi-task GP model learns the decomposition, it can successfully predict the torques for combinations of contexts and input space locations that have not been present in the training data, outperforming interpolation between separately learned single-task models (Chai, Williams, Klanke, & Vijayakumar, 2008).

In the framework of multiple contexts management, UGR have studied how different models can be abstracted by a simple spiking cerebellar model. It has become clear that the separability capability at the granular layer is of great importance to reduce interferences between different learned models. This has also been informed by the equivalent LWPR-based simulations: The machine learning approach (UEDIN) uses different LWPR modules to avoid interferences between different learned contexts models. We have studied different ways to encode both sensorimotor signals and context signals at the input of the model extraction engine and we have obtained a trade-off between the accuracy and the capability to abstract different models with low interference. The accuracy of the abstracted models becomes maximal if the sensorimotor signals are prioritised dedicating more encoding and computing resources along the processing data path (Mossy-Granular-Purkinje-DCN cells). Therefore, dedicating specific encoding/processing pathways for the sensorimotor signals of each

different model (context) leads to a high accuracy model abstraction capability. Alternatively to a complete separate representation of the sensorimotor signals of different contexts, UGR is also studied how specific context-related signals can efficiently drive the learning process and allow different models (contexts) to be abstracted in a non-destructive manner.

### Representation for exploration and active perception

The last major subtopic within WP2 is about finding effective ways of generating exploratory movements, that is, we wish to create movement plans which not just represent a path between two points A and B, but rather yield informative sensor input during the motion. Working towards this goal involves studying

- 1) dimensionality reduction of movement data, for representing sequences of postures of systems with possibly large degrees of freedom in a *compact* manner,
- 2) dynamical systems representations of movement plans, for being able to *flexibly* scale movements in space and time,
- 3) the optimality of movements with respect to the amount of information they yield, for example in a haptic discrimination task, and
- 4) dimensionality reduction of sensory data, for acquiring a compact description of what is being sensed, ideally yielding “cognitive” notions about the environment.

We have generated novel results in each of these domains. UEDIN has investigated representations of movements which are beneficial for the learning and execution of explorative movements. We have suggested classes of movements for the identification of the mass and of the general inertia properties of a held object. (Bitzer & Vijayakumar, 2009)



**Figure 9: UEDIN setup of tactile sensors mounted on Schunk dexterous hand SDH-2 for tactile discrimination.**

In addition, we investigated ways to actively extract information from sensory data by using appropriate exploratory movements. For active learning, we are interested in determining the optimal action  $\mathbf{x}^*$  to take during test time such that the Mutual Information between sensors  $\mathbf{y}$  and hidden latent state  $\theta$ ,  $I(\theta; \mathbf{y} | \mathbf{x})$ , is maximized.

This framework was successfully implemented in the framework of Gaussian Process sensor action modelling and Quadratic Mutual Information (QMI) based action selection (Saal, Ting, & Vijayakumar, 2010a); (Saal, Ting, & Vijayakumar, 2010b). This theoretically well founded formulation was implemented with excellent results on the tactile discrimination of liquid viscosities in real time on a Schunk tactile hand.

## I.1.5 WP3

**Leader:** DLR

**Participants:** DLR, UEDIN, UCAM - DENG

## WP3 objectives

DLR investigated an artificial arm-hand system to provide a rich motor domain for haptic cognition. The arm-hand system follows strong anthropomorphic principles to match the complexity of real-world haptic cognition. Using an antagonistic drive concept for all joints of the arm, we focus on copying the human kinematic and dynamic structure, both for the hand as for the arm. Copying human dynamics properties is important with respect to its controllability by cerebellum-based methodologies; especially the mechanically realised flexibility, which will allow for storing energy and thus for an increased stability. It will therefore require less accurate and lower-frequency feedback loops. The limited applicability of cerebellum-based controllers to classical robotic structures has been reported from various sources in the literature, since the evolutionary development of the cerebellar structure is directly related to the dynamic properties of the skeletomuscular structure. The development within SENSOPAC involves study of the corresponding human kinematic structures and investigating their applicability for artificial arm-hand structures, taking different drive concepts into account.

## WP3 Results

### Implementation of redundant actuators

After more than a decade of service robotics research, the results of the community regarding major challenges such as grasping, manipulation, and mobility still are not really satisfying and seem to stagnate. In our observation, this is related to major shortfalls in the tool chain and especially the hardware. Since robotic systems get increasingly complex, the danger of damage increases. A single collision during operation may cost huge amounts of money and time. Therefore application developers have to be very conservative when testing new methods and strategies. This slows down progress dramatically and hardly gives a chance to develop radically different control/motion planning strategies.

The dynamical properties of actuators are not sufficient for several human tasks. Particularly in cyclic tasks (e.g., running) or highly dynamic tasks (throwing), the actuators cannot provide the required energy during peak loads without getting to bulky and heavy. Therefore we are convinced that major steps in space and service robotics are only possible if future robotic systems have two major characteristics:

- (1) They have to be robust against “every-day” impacts, and
- (2) they have to be able to store energy short-term.

This can be achieved by introducing variable passive compliance into future robotic systems. For this reason, we realised a highly anthropomorphic hand-arm system using these promising approaches.

### DLR’s Anthropomorphic Hand Arm System

#### Shoulder and Elbow


The arm of the Hand Arm System, (consisting of a 3-DoF shoulder and a 2-DoF elbow) is as close to the human archetype as possible in terms of kinematics, dynamics, and force. Nevertheless the target must be not to copy nature, but rather to understand the basic functionalities and transfer them to the technical system. Since the arm requirements are rather different from the hand requirements, different actuation principles were investigated. The arm has to carry much higher loads than the fingers. The actuators have to apply the necessary force to counter gravity for the whole arm, which is negligible for the fingers. Furthermore, angular accuracy is much more important, and the dynamics within the system are not negligible, so vibration damping performance is essential for proper functioning of the whole hand-arm system.

To ensure the capability of the arm to perform human tasks in every position within the workspace, ergonomics data for every joint of the human arm were analysed. From this,

the final dimensioning of the drives has been derived. Of course the actuation of the arm has to be capable of storing short-term energy. Furthermore, the energy consumption of the system has to be minimised, thus leading to an approach which does not favour antagonism.

### Forearm

Since the hand itself has no drives or electronics, these have to be integrated into the forearm. To realise antagonistic drives for the total of 19 active DoF (4 DoF thumb, index, middle finger, 3 DoF ring finger, and 4 DoF little finger) within the hand and the 3 DoF of the wrist and the forearm rotation, 44 actuators, 44 elastic elements and 88 position sensors are located in the forearm.

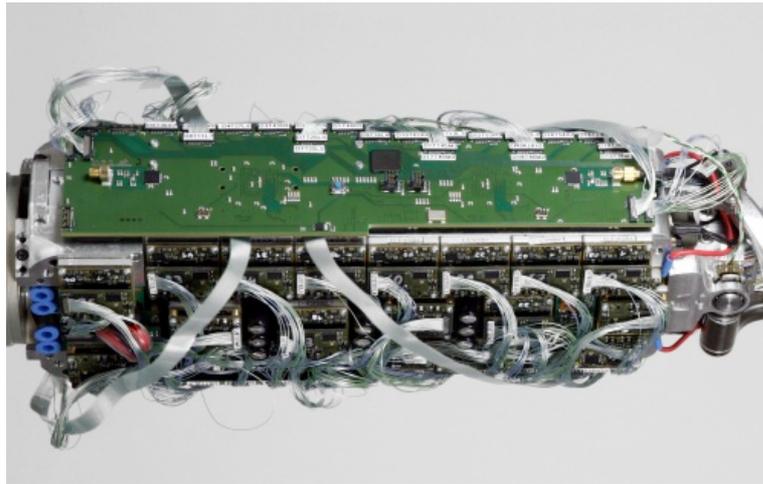

*Figure 10 : Forearm*

### Wrist


To reduce friction by keeping the angle of tendon deflection minimal, as well as to downsize coupling between wrist and finger motion, a 4-bar mechanism wrist, forming a 3-D anti-parallelogram, has been developed.

### Anthropomorphic Hand

In the design of an anthropomorphic hand, our goal is to closely copy the properties of the human hand rather than its intrinsic structure. The solutions found in biology must be transferred to technical components and evaluated before they can actually be used.


### Anatomy of the Human Hand

The human hand consists of a palm with metacarpal bones and finger bones. The index, middle and ring finger are similar in their structure and configuration, whereas the thumb and little finger differ considerably; the latter has a bone structure similar to the middle fingers, but its tendons, ligaments and muscles resemble those of the thumb. Furthermore, a thorough understanding of the hand joints is imperative for realising an anthropomorphic hand, since joints found in biology are radically different from technical joints. The human hand mainly uses three kinds of joints, which can be divided into 1-DoF and 2-DoF joints. The 1-DoF joints in the hand all are hinge joints; 2-DoF joints can be divided into two types. The metacarpal (second down) joint of the thumb is a saddle joint but with non-orthonormal axes and has been described geometrically by Kuczynski by the saddle of a scoliotic horse. In contrast, the metacarpal (3rd down) joints of the fingers are condyloid. The main difference between saddle and condyloid joints is that condyloid joints have (roughly) intersecting axes, which saddle joints do not have. For the thumb, the axes of the metacarpal are non-orthogonal screws (Fig. 11).

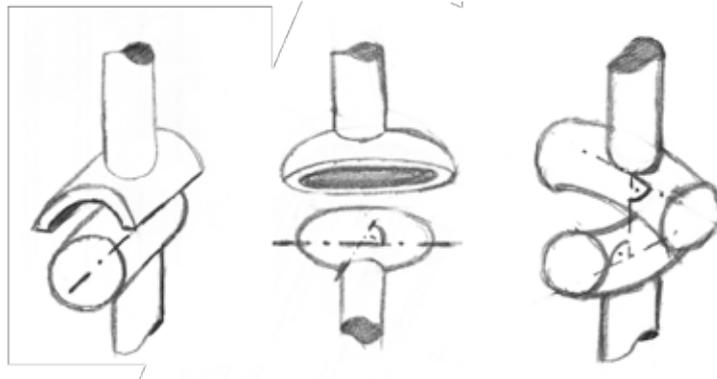


**Figure 11: Joint types of the human hand: hinge, condyloid, and saddle joint**

Following Kapandji, we consider the metacarpal of the thumb is a 2-DoF saddle joint. The interphalangeal joints of the thumb are similar to those of the fingers.

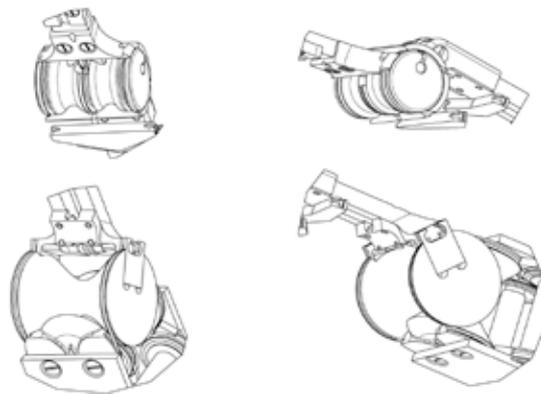


**Figure 12: Biologically inspired overload-proof joints**

The structure of the finger is designed as an endoskeleton with bionic joints (Fig. 12). The metacarpal joint is designed as a hyperboloidally shaped saddle joint, whereas the interphalangeal finger joints are designed as hinge joints. The proximal interphalangeal joint of the thumb is, in contrast to biology, also designed as a hinge joint. This circumvents the negative side effects of technical condyloid joints, while leaving out the thumb's fifth degree of freedom is not problematic. The kinematics of the new hand is closely adapted to the human hand. So every finger differs in bone-length, size and kinematics. For example, the fifth finger PIP joint has to have an inclination of about 15 deg to enable opposition to the thumb, while the index and middle finger only have minimal inclination. All joints enable dislocation of the bones without damage in case of overload, using the elasticity in the drive train. A fully functional version of the finger, using alloy structure and steel cables, has been attached to an antagonistic drive unit (8 motors; see Fig. 13).

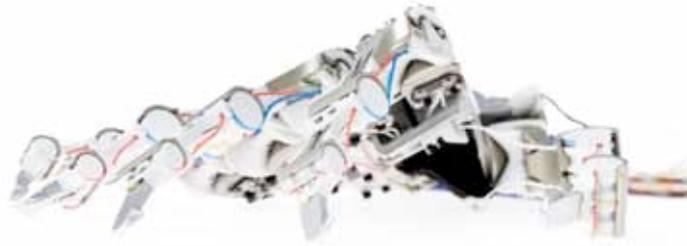


**Figure 13: Final finger design**

Based on this design, the middle, ring and 5th finger has been designed differing in size, angle of axes (inclination), strength, and even number of DoF. The design of the index finger also has been partly used for the thumb to keep machining and cost effort as low as possible.

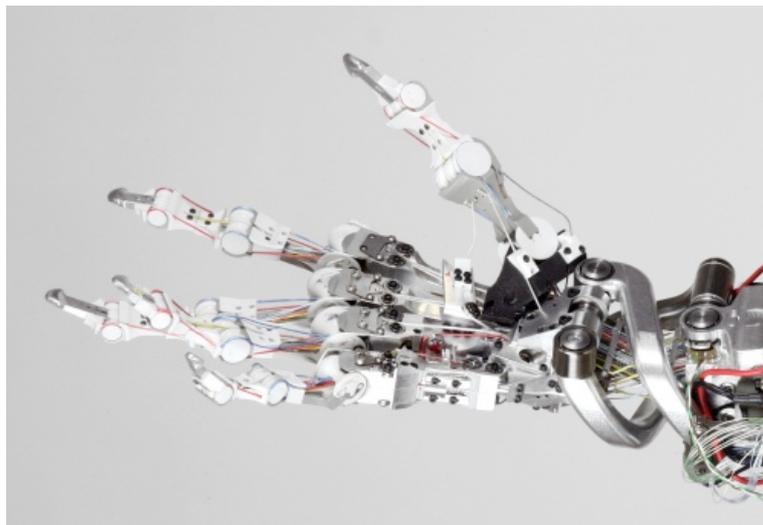

**Figure 14: Final hand and wrist**

A palm routing the 38 tendons to the fingers has been designed. The focus within the design has been on minimum friction since the latter reduces force measurement precision directly because there is no force measurement within the fingers. Second the palm and the tendons routing have been optimized regarding maintenance to reduce "downtime" of the system due to tendon wear/ breakage. The whole hand has been assembled and attached to the wrist and forearm within the project (Fig. 15).

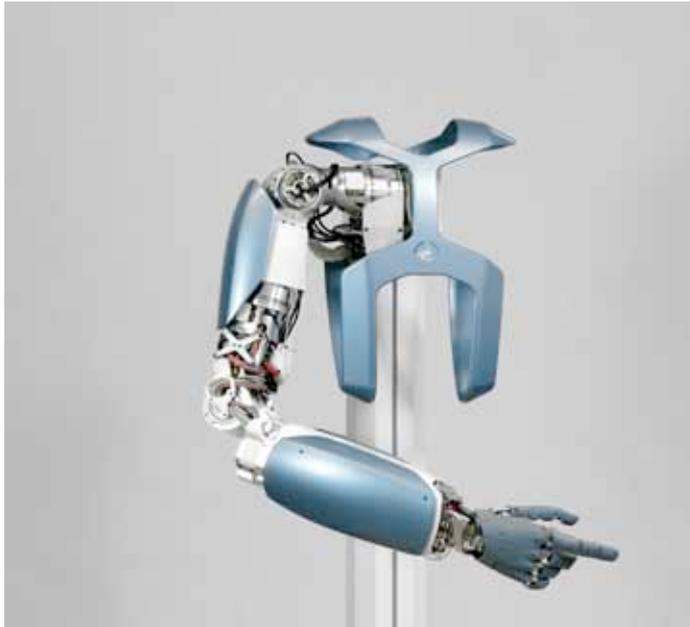

*Figure 15: DLR's Anthropomorphic Hand-Arm System*

### I.1.6 WP5

**Leader:** LUND

**Participants:** LUND, PAVIA, UGR, BIU, ERASMUS, UPMC

#### WP5 objectives

The brain is a highly versatile and adaptive cognitive system, which at present is very far from being matched by any artificial system available. Therefore, in the creation of cognitive systems, it is natural to seek to replicate aspects of brain function. However, a large obstacle for the utilization of brain functions in artificial systems has been that the knowledge of how the brain works is still very limited. The goal of WP5 within SENSOPAC has been to explore and model brain circuitry function in use during haptic discrimination. A key in the work towards this goal has been a description of a neuronal system at a unique level of detail, achieved with state-of-the-art recording techniques for analyzing brain circuitry function and a systematic analysis of the connectivity structure of the neuronal network.

In order to target the goals of SENSOPAC to reproduce brain circuitry operation during sensorimotor interactions in haptic discrimination, the overarching aim of WP5 was to reconstruct the function of one full functional subsystem of the cerebellum, and to implement it in the LSAM (Large-scale analog model) for application to the robotic system. The reason why this effort was focussed on the cerebellum is that an understanding of brain circuitry mechanisms requires a comprehensive knowledge of the neuronal connectivity and the integrative, physiological and plasticity mechanisms for all neuron types that make up the network - this depth of knowledge was only feasible to achieve for the cerebellum because of the quite extensive previous knowledge of the general structure of the neuronal network. For the cerebellum, we had 1) knowledge of all the constituent neuronal elements and their overall connectivity and 2) the establishment of the microcomplex circuitry structure which describes the external input-output connectivity of the cerebellar cortical neurons and constitutes an important frame of reference against which the functions of cerebellar neurons recorded from can be interpreted. In addition, of particular relevance for the SENSOPAC project, the microcircuitry characterization of the intermediate cerebellar system for arm-hand motor control is highly detailed and specific. This system is involved in the

control of distal muscles of the arm and hand, has a very rich and detailed representation of input from distal finger skin sensors, and is the system which LSAM seeks to replicate.

However, several pieces of crucial information was lacking, and many of the pertaining questions required the development of new recording techniques to probe the functions of specific, crucial neuron types located deep in tissue in the intact, living brain. In addition, any understanding of neuronal function rests on the properties of the different ion channels that compose the intrinsic responsiveness of the neuron. An additional important goal for SENSOPAC was therefore to be able to describe the function of at least some neuron types at a very high degree of completeness in terms of the activated conductances during processing of synaptic activation. The description of a functional subsystem of the brain will rest on a much more solid neuroscientific ground when the roles of all the different types of conductances can be accounted for.

## WP5 Results

The neuroscience work within SENSOPAC has resulted in new recording techniques for obtaining highly detailed information from different types of deep-lying neurons. It has also resulted in some crucial investigations of neuronal function (Belmeguenai et al., 2010; Jörntell et al., 2010; D'Angelo and De Zeeuw, 2009) and the functional consequences of synaptic plasticity using gene manipulations (Andreescu et al., 2010; Schonewille et al., 2010; Van Den Maagdenberg et al., 2010; Wulff et al., 2009; Van Woerden et al., 2009; Van Der Giessen et al., 2008; Hansel et al., 2007). Temporal features of this granular layer have been extensively studied using EDLUT simulator (Garrido J.A. et al. 2011) Finally it has seen the birth of a complete, conductance-based model of the cerebellar granule layer (D'Angelo and De Zeeuw, 2009). These bits and pieces of information have been important to fill up critical remaining holes in our understanding of cerebellar function and have allowed for the generation of computational models, at different levels of abstraction (De Gruijl et al., 2009), for exploring and describing the function of neuronal microcircuitry and brain networks (Arleo et al., 2010; Passot, Luque & Arleo, 2010; Passot & Arleo 2010).

The end-result of WP5 is an executable model of cerebellar function, "LSAM" (Large-Scale Analogue Model), incorporating simplifications made possible by our discovery of an accurate, low-parametric Purkinje cell model. In combination with results from the other neuroscience partners within SENSOPAC, we could conclude that the conventional model of cerebellar function is inadequate and need to be revised. The multivariate formulation of LSAM, i.e. a formulation in matrix form accommodating an arbitrary number of microcomplexes, was developed and implemented as a C program.

We integrated the executable implementation of LSAM with EDLUT, a spiking-level simulator developed for exploring neuronal circuitry function at a higher level of detail than in LSAM. This integration allows spiking models to first be developed in a stand-alone EDLUT system, and then be carried directly over to LSAM and used as-is. As an example of application, we plugged in an EDLUT simulation of a granule cell layer into LSAM, using the standard model of granule cells provided with the EDLUT package. LSAM proved to be highly stable, despite high levels of noise.

BIU published two papers over the funding period in the framework of SENSOPAC. These include the papers entitled "Implications of functional anatomy on information processing in the deep cerebellar nuclei" by Baumel Y, Jacobson GA, and Cohen D (Front Cell Neurosci. 2009;3:14) and "Invariant phase structure of olivo-cerebellar oscillations and its putative role in temporal pattern generation" by Jacobson GA, Levi, Yarom Y, Cohen D (Proc Natl Acad Sci U S A. 2009;106(9):3579-84). The papers deal with potential impacts on the cerebellar cortex and nuclei following harmaline application. The papers indicate that the inferior olive may underlie not only rhythmic activity and synchronization, but also temporal patterns that require intervals shorter than the cycle

duration. The maintenance of phase differences across frequency changes enables the olivo-cerebellar system to replay temporal patterns at different rates without distortion, possibly allowing the execution of tasks at different speeds.

### I.1.7 WP6

**Leader:** UEDIN, DLR, PAVIA

**Participants:** UEDIN, DLR, PAVIA, UPMC, ALTJIRA, LUND, UGR, UCAM - DENG

#### WP6 objectives

SENSOPAC has also integrated the output from the different work packages to develop haptically competent cognitive systems working on the highly advanced robotic arm-hand system used within the SENSOPAC project. In WP6, a first crucial step was to prepare and adapt the different control schemes to operate on the robotic system. With these solutions at hand, the major goal has been to compare and integrate machine-learning based approaches with neuronal circuitry-inspired and biomimetic neuroscience models for implementations of haptically competent cognitive systems in order to seek improvement to the haptic discrimination processes in the cross-talk, or exchange of ideas, between the systems.

#### WP6 Results

In cooperation between LUND/SICS and DLR, we implemented an interface between LSAM and the DLR robot arm using a shared memory approach. The main difficulty was that LSAM runs non-real-time, while the robot runs in hard real-time, at ten times higher sampling frequency. We were able to solve these problems using a handshake protocol based on semaphores and ring buffers, combined with decimation filters. The implicit low-pass filtering introduces delays having a negative impact on the stability of LSAM's control loop, but these problems could be solved by using a Smith predictor, to which the biomimetic cerebellar controller structure proved to be well suited.

UPMC developed a neuronal circuitry-inspired, artificial haptic discrimination system (Bologna LL et al, 2009; Bologna LL et al, 2010a,b). The system uses neuronal spiking patterns, generated by the patterns of sensor activation, to discriminate between objects. In cooperation between LUND/SICS and UPMC, we analysed the requirements of using LSAM for haptic perception. We concluded that LSAM, representing the arm-hand control area of the intermediate cerebellum, can be used as-is and can provide advantages in the haptic discrimination process. In addition, LSAM can be used to simulate internal exploratory processes of the brain, represented in lateral cerebellar systems, which is a natural part of brain object identification could be described.

.



UEDIN developed a framework for discrimination of dynamic object properties based purely on the learned sensorimotor contingency representation of actions and tactile sensor activations (Saal, Ting, & Vijayakumar, 2010a). This was used to not only discriminate between liquids of different viscosity (e.g., water, motor oil and glycerin of equal weight in a bottle) but also used to implement an info-max

based active learning framework for optimizing the exploratory movements for discrimination (Saal, Ting, & Vijayakumar, 2010b).

In the funding period of SENSOPAC, ALTJIRA has co-authored one paper: E. Ros and E. M. Ortigosa and R. Agis and M. Arnold and R. Carrillo (2006), "Real time computing platform

for spiking neurons (RT-Spike)", *IEEE Transactions on Neural Networks* 17 (4) 1050-1063. The initial efforts by ALTJIRA to create a parallel implementation of the EDLUT system to obtain faster computational results were of reduced relevance of the project after focussing more on the LSAM implementations of the cerebellar circuitry.

## II. Dissemination and Use

---

### Publications

2011

Brasselet R, Johansson RS, Arleo A (2011a) Quantifying neurotransmission reliability through metrics based information analysis. *Neural Computation*, 23(4): 852-881.

Brasselet R, Johansson RS, Arleo A (2011b) Isometric coding of spiking haptic signals by peripheral somatosensory neurons. In Cabestany J et al., eds, LNCS - Advances on Computational Intelligence, Proceedings of the 11th International Work-Conference on Artificial Neural Networks (IWANN 2011), in press.

Arleo A, Brasselet R, Bologna LL, Pinoteau J, Jörntell H, Johansson RS (2011) Neural coding in the early stages of the somatosensory pathway: a metrical information theory analysis of human microneurography data. In Abstracts of the 10th French Society for Neuroscience Meeting, Marseille, France.

Bengtsson F, Brasselet R, Johansson RS, Arleo A, and Jörntell H (submitted) Optimal integration of sensory quanta in the cuneate nucleus.

Passot J-B, Arleo A (submitted) Internal models in the cerebellum: coupling scheme and sleep-dependent memory in procedural tasks.

2010

Arleo A, Nieuwenhuis T, Bezzi M, D'Errico A, D'Angelo E, Coenen OJ (2010) How Synaptic Release Probability Shapes Neuronal Transmission: Information-Theoretic Analysis in a Cerebellar Granule Cell. *Neuronal Computation*, 22(8): 2031-2058.

Jonathan Mapelli, Daniela Gandolfi and Egidio D'Angelo. (2010). High-pass filtering and dynamic gain regulation enhance vertical bursts transmission along the mossy fiber pathway of cerebellum. *Frontiers in CELLULAR NEUROSCIENCE*, April 2010.

Sergio Solinas, Thierry Nieuwenhuis and Egidio D'Angelo (2010). A realistic large-scale model of the cerebellum granular layer predicts circuit spatio-temporal filtering properties. *Frontiers in CELLULAR NEUROSCIENCE*, April 2010, volume 4, article 12.

Marianna Boso, Enzo Emanuele, Francesca Prestori, Pierluigi Politi, Francesco Barale, Egidio D'Angelo. (2010). (Proofs in press). Autism and genius: is there a link? The involvement of central brain loops and hypotheses for functional testing. *Functional Neurology* 2010; 25(1): 27-32.

Egidio D'Angelo. (2010) on "Homeostasis of intrinsic excitability: making the point". *J Physiol* 588.6 (2010) pp 901-902.

J. A. Garrido, E. Ros, R. Carrillo, E. D'Angelo (2011), The Impact of Multiple Synaptic Weights on Spike Timing in the Cerebellar Input Layer: a Simulation Study. Under second revision in *Neural Computation*.

N. R. Luque, J.A. Garrido, R.R. Carrillo, O. Coenen, E. Ros, (2011a) Cerebellar-like corrective-model inference engine for manipulation tasks . Under second revision in *IEEE T. on System, Man and Cybernetics B.*

N. R. Luque, J.A. Garrido, R.R. Carrillo, O. Coenen, E. Ros, (2011b) Cerebellar Input Configuration towards Object Model Inference in Manipulation Tasks. Under second revision in *IEEE T. Neural Networks.*

N. R. Luque, J.A. Garrido, R.R. Carrillo, E. Ros, S. Tolu (2011c) Adaptive Cerebellar Spiking Model in a Bio-inspired Robot-Control Loop. Under submitted to *Int. Journal of Neural Systems*, .

S. Tolu, M. Vanegas, N. R. Luque, E. Ros, (2011a) *Bio-inspired Adaptive Feedback Error Learning Architecture For Motor Control*, submitted to Biological Cybernetics.

N. R. Luque, J.A. Garrido, R.R. Carrillo, E. Ros, Cerebellar Spiking Engine: Towards Object Model Abstraction in Manipulation, ICNN'2010, Barcelona, July 2010.

Jo-Anne Ting, Aaron D'Souza, Sethu Vijayakumar and Stefan Schaal, Efficient Learning and Feature Selection in High Dimensional Regression, Neural Computation, vol. 22, no. 4, pp. 831-886 (2010).

Hannes Saal, Jo-Anne-Ting and Sethu Vijayakumar, Active Estimation of Object Dynamics Parameters with Tactile Sensors, Proc. IEEE/RSJ Intl. Conf. on Intelligent Robots and Systems (IROS 2010), Taiwan (2010).

Sebastian Bitzer, Matthew Howard and Sethu Vijayakumar, Using Dimensionality Reduction to Exploit Constraints in Reinforcement Learning, Proc. IEEE/RSJ Intl. Conf. on Intelligent Robots and Systems (IROS 2010), Taiwan (2010).

Hannes Saal, Jo-Anne-Ting and Sethu Vijayakumar, Active sequential learning with tactile feedback, In: Teh YW and Titterton M (Eds.), Proc. 13th Int. Conf. on Artificial Intelligence and Statistics (AISTATS 2010), JMLR: W&CP 9:677-684, Chia Laguna, Sardinia, Italy (2010).

Djordje Mitrovic, Sho Nagashima, Stefan Klanke, Takamitsu Matsubara and Sethu Vijayakumar, Optimal Feedback Control for Anthropomorphic Manipulators, Proc. IEEE International Conference on Robotics and Automation (ICRA 2010), Anchorage, Alaska, USA (2010).

Djordje Mitrovic, Stefan Klanke and Sethu Vijayakumar, Adaptive Optimal Feedback Control with Learned Internal Dynamics Models, In: O. Sigaud and J. Peters (eds.): From Motor Learning to Interaction Learning in Robots, SCI 264, pp. 65-84, Springer-Verlag (2010).

Boele HJ, Koekkoek SK, De Zeeuw CI. (2010) Cerebellar and extracerebellar involvement in mouse eyeblink conditioning: the ACDC model. Front Cell Neurosci. 4:3:19.

Fecteau JH, Roelfsema P, De Zeeuw CI, Kousta S. (2010) Perceptual learning, motor learning, and automaticity. Trends Cogn Sci. 14(1):1. Hoebeek, F.E., Witter, L., Ruigrok,

T.J.H., and De Zeeuw, C.I. (2010) Differential olivo-cerebellar cortical control of rebound activity in the cerebellar nuclei. PNAS, 107(18):8410-5.

Jongen JL, Pederzani T, Koekkoek SK, Shapiro J, van der Burg J, De Zeeuw CI, Huygen FJ, Holstege JC. (2010) Autofluorescent flavoprotein imaging of spinal nociceptive activity. J Neurosci. 30(11):4081-7.

Renier N, Schonewille M, Giraudet F, Badura A, Tessier-Lavigne M, Avan P, De Zeeuw CI, Chédotal A. (2010) Genetic dissection of the function of hindbrain axonal commissures. PLoS Biol. 2010 Mar 9;8(3):e1000325.

Burguiere E, Arabo A, Jarlier F, De Zeeuw CI, and Rondi-Reig L. (2010) Role of the Cerebellar Cortex In Conditioned Goal-directed Behavior. J. Neuroscience, In Press.

Schonewille M, A. Belmeguenai, S.H. Houtman, G. Ohtsuki, H.J. Boele, B.J. van Beugen, Z. Gao, W.E. Amerika, A. Badura, E. Hosity, S.K. Koekkoek, F.E. Hoebeek, Y. Elgersma, C. Hansel and C.I. De Zeeuw (2010) Purkinje cell-specific knock-out of the protein phosphatase PP2B impairs potentiation and cerebellar motor learning. Neuron, In Press.

Smit A, Jos Van der Geest, Mick Metselaar, Aad Van der Lugt, Frans VanderWerf, and C.I. De Zeeuw (2010) Long-term changes in cerebellar activation during functional recovery from transient peripheral motor paralysis. Experimental Neurology, In Press.

- Passot J-B, Luque N, Arleo A (2010) Internal models in the cerebellum: a coupling scheme for online and offline learning in procedural tasks. In Doncieux, S. et al., editors, *LNAI - Simulation of Adaptive Behavior*, 6226:435-446, Springer-Verlag.
- Brasselet R, Arleo A (2010) Local metrical information: application to the perceptual magnet effect. In Gervais, R. et al., editors, *Proceedings of the Fifth french conference on computational neuroscience*.
- Bologna LL, Brasselet R, Maggiali M, Arleo A (2010a) Neuromimetic encoding/decoding of spatiotemporal spiking from an artificial touch sensor. In *Neural Networks (IJCNN)*.
- Bologna LL, Brasselet R, Maggiali M, Arleo A (2010b) Effective encoding/decoding of spiking signals from an artificial touch sensor. In Gervais, R. et al., editors, *Proceedings of the Fifth french conference on computational neuroscience*.
- Passot J-B, Arleo A (2010) A new coupling scheme of cerebellar internal models: online and offline adaptation in procedural tasks. In Gervais, R. et al., editors, *Proceedings of the Fifth french conference on computational neuroscience*.
- Brasselet R, Johansson RS, Arleo A (2010a) Quantifying neurotransmission through an entropy measure embedding spike train metrics. In *Workshop on Shapes of Brain Dynamics - abstracts*, Paris, France.
- Brasselet R, Johansson RS, Arleo A (2010b) Quantifying neurotransmission through an entropy measure embedding spike train metrics. In *Workshop on Dendrites, Neurones and Networks- abstracts*, Warwick, UK.
- Brasselet R, Johansson RS, Arleo A (2010c) Quantifying neurotransmission by taking into account the metrical properties of spike trains. In *SIMAI - Symposium on new trends in scientific computing: computational Biology*, Abs. N. 628, Cagliari, Italy.
- Brasselet R, Johansson RS, Arleo A (2010d) Quantifying neurotransmission through an entropy measure embedding spike train metrics. In *Workshop on Spike Train Measures and Their Applications to Neural Coding - abstracts*, Plymouth, UK.
- Braun DA, Waldert S, Aertsen A, Wolpert DM & Mehring C (2010). Structure learning in a sensorimotor association task. *PLoS ONE* 5(1): e8973
- Braun DA, Mehring C & Wolpert DM (2010). Structure learning in action. *Behavioural Brain Research* 206: 157-165
- Ingram JN, Howard IS, Flanagan JR & Wolpert DM (2010). Multiple grasp-specific representations of tool dynamics mediate skilful manipulation. *Current Biology* 20:618-623
- Wolpert DM & Flanagan JR (2010). Motor Learning. *Current Biology* 20 (11): R467-472
- Wolpert DM & Flanagan JR (2010) Q&A: Robotics as a tool to understand the brain. *BMC Biology* 8:92
- Nagengast AJ, Braun DA & Wolpert DM (In Press) Risk-sensitive optimal feedback control accounts for sensorimotor behavior under uncertainty. *PLoS Computational Biology*
- Dean, P., Porrill, J., Ekerot, C.-F., & Jörntell, H. The cerebellar microcircuit as an adaptive filter: experimental and computational evidence. *Nature Rev. Neurosci.* 11, 30-43 (2010).
- Jörntell, H., Bengtsson, F., Schonewille, M., & de Zeeuw, C.I. Cerebellar molecular layer interneurons - computational properties and roles in learning. *Trends in Neuroscience*, under revision (2010).
- Nilsson, Martin; Jörntell, Henrik; van der Smagt, Patrick (2010). Robotic applications of LSAM: Large-Scale Analog Model of the Cerebellum Based on Reverse-engineering. *Proc. 4th International Conference on Cognitive Systems Zürich*.

D'Angelo, Egidio; Solinas, Sergio; Ros, Eduardo; Garrido, Jesus; Jörntell, Henrik; van der Smagt, Patrick (2010). Complex Dynamics in the Granular Layer of the cerebellum: Large-Scale Computational Reconstructions. Proc. 4th International Conference on Cognitive Systems Zürich.

Franziska Zacharias, Ian S. Howard, Thomas Hulin, and Gerd Hirzinger (2010). Workspace Comparisons of Setup Configurations for Human-Robot Interaction. IROS 2010 (to be published).

Nilsson, M., Ekerot, C.-F., Jörntell, H.: "The comparator hypothesis revisited: It is not the inferior olive" (in process of submission). Theorin A, Johansson RS (2010) Selection of Prime Actor in Humans during Bimanual Object Manipulation. *J Neurosci* 30: 10448-10459

Andreescu CE, Prestori F, Brandalise F, D'Errico A, De Jeu MT, Rossi P, Botta L, Kohr G, Perin P, D'Angelo E, De Zeeuw CI (2010) NR2A subunit of the N-methyl d-aspartate receptors are required for potentiation at the mossy fiber to granule cell synapse and vestibulo-cerebellar motor learning. *Neuroscience*

Belmeguenai A, Hosy E, Bengtsson F, Pedroarena CM, Piochon C, Teuling E, He Q, Ohtsuki G, De Jeu MT, Elgersma Y, De Zeeuw CI, Jörntell H, Hansel C (2010) Intrinsic plasticity complements long-term potentiation in parallel fiber input gain control in cerebellar Purkinje cells. *J Neurosci* Oct 13;30(41):13630-43

Bosman LW, Koekkoek SK, Shapiro J, Rijken BF, Zandstra F, van der Ende B, Owens CB, Potters JW, de Gruijl JR, Ruigrok TJ, De Zeeuw CI (2010) Encoding of whisker input by cerebellar Purkinje cells. *J Physiol* Oct 1;588(Pt 19):3757-83

Schonewille M, Belmeguenai A, Koekkoek SK, Houtman SH, Boele HJ, van Beugen BJ, Gao Z, Badura A, Ohtsuki G, Amerika WE, Hosy E, Hoebeek FE, Elgersma Y, Hansel C, De Zeeuw CI (2010) Purkinje cell-specific knockout of the protein phosphatase PP2B impairs potentiation and cerebellar motor learning. *Neuron* Aug 26;67(4):618-28

## 2009

Jonathan Mapelli, Daniela Gandolfi, and Egidio D'Angelo. (2009) Combinatorial Responses Controlled by Synaptic Inhibition in the Cerebellum Granular Layer. *J Neurophysiol* 103: 250 - 261.

E. D'Angelo, S.K.E. Koekkoek, P. Lombardo, S. Solinas, E. Ros, J. Garrido, M. Schonewille and C.I. De Zeeuw (2009) Timing in the cerebellum: oscillations and resonance in the granular layer. *Neuroscience* Volume 162, Issue 3, 1 September 2009, Pages 805-815.

Anna D'Errico, Francesca Prestori and Egidio D'Angelo (2009) Differential induction of bidirectional long-term changes in neurotransmitter release by frequency-coded patterns at the cerebellar input. *J Physiology*, 2009, pp 1-15. (See the Comment by Philippe Isope)

D'Angelo E, De Zeeuw CI. (2009) Timing and plasticity in the cerebellum: focus on the granular layer. *Trends in Neurosciences*, Volume 32, Issue 1, pp. 30- 40.

Shyam Diwakar, Jacopo Magistretti, Mitchell Goldfarb, Giovanni Naldi, Egidio D'Angelo. (2009) Axonal Na<sup>+</sup> channels ensure fast spike activation and back-propagation in cerebellar granule cells. *J Neurophysiol*. 2009 Feb;101, pp. 519- 32. Epub 2008 Dec 10.

Lisa Mapelli, Paola Rossi, Thierry Nieuws, Egidio D'Angelo. (2009) Tonic Activation of GABAB Receptors Reduces Release Probability at Inhibitory Connections in the Cerebellar Glomerulus. *J Neurophysiol* 101, pp. 3089-3099.

Gilad A. Jacobson, Iddo Lev, Yosef Yarom and Dana Cohen (2009) Invariant phase structure of olivo-cerebellar oscillations and its putative role in temporal pattern generation. *Proc. Natl. Acad. Sci. USA*, 106(9), 3579-3584

Yuval Baumel, Gilad A. Jacobson and Dana Cohen (2009) Implications of functional anatomy on information processing in the deep cerebellar nuclei. *Front Cell Neurosci.* 3, 14

Adrian Haith and Sethu Vijayakumar, Implications of different classes of sensorimotor disturbance for cerebellar-based motor learning models, *Biological Cybernetics*, Vol. 100, No. 1, pp. 81-95, Springer-Verlag (2009).

De Gruijl JR, van der Smagt P, De Zeeuw CI. (2009) Anticipatory grip force control using a cerebellar model. *Neuroscience*. 162(3):777-86.

Hannes Saal, Jo-Anne-Ting and Sethu Vijayakumar, Active Filtering for Robot Tactile Learning, In: Workshop on Adaptive Sensing, Active Learning, and Experimental Design, Neural Information Processing Systems (NIPS 2009), Whistler, Canada (2009).

Sebastian Bitzer and Sethu Vijayakumar, Latent Spaces for Dynamic Movement Primitives, Proc. 9th IEEE RAS International Conference on humanoid Robots (Humanoids '09), Paris, France (2009).

Hannes Saal, Sethu Vijayakumar and Roland Johansson, Information about Complex Fingertip Parameters in Individual Human Tactile Afferent neurons, *The Journal of Neuroscience*, 29(25):8022-8031, (2009).

Jan Steffen, Stefan Klanke, Sethu Vijayakumar and Helge Ritter, Towards Semi-supervised Manifold Learning: UKR with Structural Hints, Proc. 7th International Workshop on Self Organizing Maps (WSOM'09), Florida, USA (2009).

Sethu Vijayakumar, Marc Toussaint, Georgios Petkos and Matthew Howard, Planning and Moving in Dynamic Environments: A statistical machine learning approach, in (eds.) Sendhoff, Koerner, Sporns, Ritter, Doya, *Creating Brain Like Intelligence: From Principles to Complex Intelligent Systems*, LNAI-Vol. 5436, Springer-Verlag ISBN: 978-3-642-00615-9 (2009).

Brasselet R, Johansson RS, Arleo A (2009a) Optimal context separation of spiking haptic signals by second-order somatosensory neurons. In Bengio Y et al., eds, *Advances in Neural Information Processing Systems*, 22:180-188.

Brasselet R, Johansson RS, Arleo A (2009b) Fast encoding/decoding of haptic microneurography data based on first spike latencies. In Renaud S and Saighi S, eds, *Proceedings of the Conference NeuroComp - abstracts*, vol. 4, page 5.

Bologna LL, Maggiali M, Sandini G, Arleo A (2009) Encoding/Decoding of spatiotemporal signals from an artificial touch sensor. In *Proceedings of the Humanoids Conference - abstracts*, Paris, France.

Brasselet B, Johansson RS, Coenen OJ-MD, Arleo A (2009) Fast encoding/decoding of haptic microneurography data based on first spike latencies. In *BMC Neuroscience - Eighteenth Annual Computational Neuroscience Meeting*, vol. 10 (Suppl1), pages 349.

Brasselet R, Johansson RS, Arleo A (2009c) Fast encoding/decoding of haptic microneurography data based on first-spike latency. In *Proceedings of the Humanoids Conference - abstracts*, Paris, France.

Sebastian Bitzer, Stefan Klanke and Sethu Vijayakumar, Does Dimensionality Reduction improve the Quality of Motion Interpolation, Proc. 17th European Symposium on Artificial Neural Networks (ESANN '09), Bruges, Belgium (2009).

Jan Steffen, Stefan Klanke, Sethu Vijayakumar and Helge Ritter, Realizing Dexterous Manipulation with Structured Manifolds using UKR with Structural Hints, In Workshop:

- Approaches to Sensorimotor Learning on Humanoid Robots, IEEE International Conference on Robotics and Automation (ICRA '09), Kobe, Japan (2009).
- Heiko Hoffmann, Stefan Schaal and Sethu Vijayakumar, Local Dimensionality Reduction for Nonparametric Regression, *Neural Processing Letters*, 29: 109-131, (2009).
- Van Woerden GM, Hoebeek FE, Gao Z, Nagaraja RY, Hoogenraad CC, Kushner SA, Hansel C, De Zeeuw CI, Elgersma Y. (2009) betaCaMKII controls the direction of plasticity at parallel fiber-Purkinje cell synapses. *Nat Neurosci.* 12(7):823-5.
- Wulff P, Schonewille M, Renzi M, Viltono L, Sassoè-Pognetto M, Badura A, Gao Z, Hoebeek FE, van Dorp S, Wisden W, Farrant M, De Zeeuw CI. (2009) Synaptic inhibition of Purkinje cells mediates consolidation of vestibulo-cerebellar motor learning. *Nat Neurosci.* 12(8):1042-9.
- Loos M, van der Sluis S, Bochdanovits Z, van Zutphen IJ, Pattij T, Stiedl O; Neuro-BSIK Mouse Phenomics consortium, Smit AB, Spijker S. (2009) Activity and impulsive action are controlled by different genetic and environmental factors. *Genes Brain Behav.* 8(8):817-28.
- van den Maagdenberg, AMJM, Pizzorusso, T., Kaja, S., Terpolilli, N., Shapovalova, M., Hoebeek, F.E., Barrett, C.F., Gherardini, L., van de Ven, R.C.G., Todorov, B., Broos, L.A.M., Tottene, A., Gao, Z., Fodor, M., De Zeeuw, C.I., Frants, R.R., Plesnila, N., Plomp, J.J., Pietrobon, D., & Ferrari, M.D. (2009) High CSD susceptibility and migraine-associated symptoms in CaV2.1 S218L mice. *Annals of Neurology* 67(1):85-98.
- Faisal A & Wolpert DM (2009). Near optimal combination of sensory and motor uncertainty in time during a naturalistic perception-action task. *Journal of Neurophysiology* 101:1901-1912.
- Braun DA, Aertsen A, Wolpert DM & Mehring C (2009). Motor task variation induces structural learning. *Current Biology* 19(4):352-7.
- Howard IS, Ingram JN & Wolpert DM (2009) A modular planar robotic manipulandum with end-point torque control. *Journal of Neuroscience Methods* 181: 199-211
- van der Smagt, Patrick; Grebenstein, Markus; Urbanek, Holger; Fligge, Nadine; Strohmayer, Michael; Stillfried, Georg; Parrish, Jonathon; Gustus, Agneta (2009). Robotics of human movements. *Journal of Physiology-Paris*, 103 (3-5), pp. 119- 132. Elsevier. <http://dx.doi.org/10.1016/j.jphysparis.2009.07.009>
- de Gruijl, J.R.; van der Smagt, Patrick; de Zeeuw, C.I. (2009). Anticipatory grip force control using a cerebellar model. *Neuroscience*. <http://dx.doi.org/10.1016/j.neuroscience.2009.02.041>
- Nagengast AJ, Braun DA & Wolpert DM (2009) Optimal Control Predicts Human Performance on Objects with Internal Degrees of Freedom. *PLoS Computational Biology* 5(6): e1000419.
- Braun DA, Aertsen A, Wolpert DM & Mehring C (2009) Learning optimal adaptation strategies in unpredictable motor tasks. *Journal of Neuroscience* 29(20):6472-6478
- Braun DA, Ortega PA & Wolpert DM (2009) Nash equilibria in multi-agent motor interactions. *PLoS Computational Biology* 5 (8):e1000468
- Howard IS, Ingram JN, Körding KP & Wolpert DM (2009) The statistics of natural movements are reflected in motor errors. *Journal of Neurophysiology* 102:1901- 1910
- Resulaj A, Kiani R, Wolpert DM & Shadlen MN (2009) Changes of mind in decision-making. *Nature*, 461: 263-266.
- Selen LPJ, Franklin DW & Wolpert DM (2009) Impedance control reduces instability that arises from motor noise. *Journal of Neuroscience* 29 (40):12606- 16

- Ahmed AA & Wolpert DM (2009) Transfer of dynamic learning across postures. *Journal of Neurophysiology*. 102 (5): 2816-24
- Bengtsson, F. & Jörntell, H. Sensory transmission in cerebellar granule cells relies on similarly coded mossy fiber inputs. *Proc Natl Acad Sci U S A* 106, 2389- 2394 (2009).
- Bengtsson, F. & Jörntell, H. Climbing fiber coupling between adjacent Purkinje cell dendrites in vivo. *Front Cell Neurosci* 3, 7 (Epub, open access) (2009).
- Birznieks I, Macefield VG, Westling G, Johansson RS (2009) Slowly adapting mechanoreceptors in the borders of the human fingernail encode fingertip forces. *J Neurosci* 29: 9370-9379
- Bowman MC, Johansson RS, Flanagan JR (2009) Eye-hand coordination in a sequential target contact task. *Exp Brain Res* 195: 273-283
- Brasselet R, Johansson RS, A A (2009) Optimal context separation of spiking haptic signals by second-order somatosensory neurons. In: Bengio Y, Schuurmans D, Lafferty J, Williams CKI, Culotta A (eds) *Advances in Neural Information Processing Systems*. MIT Press, pp 180-188
- Flanagan JR, Merritt K, Johansson RS (2009) Predictive mechanisms and object representations used in object manipulation. In: Nowak DA, Hermsdörfer J (eds) *Sensorimotor Control of Grasping: Physiology and Pathophysiology*. Cambridge University Press, Cambridge, pp 161-177
- Tazoe T, Nordmark P, Johansson RS (2009) Temporal integration of tactile information within vs. across digits. *Society for Neuroscience Abstracts*. 78.16
- Johansson RS, Flanagan JR (2009a) Sensory control of object manipulation. In: Squire LR (ed) *Encyclopedia of Neuroscience*. Academic Press, Oxford, pp 593- 604
- Johansson RS, Flanagan JR (2009b) Coding and use of tactile signals from the fingertips in object manipulation tasks. *Nat Rev Neurosci* 10: 345-359
- Johansson RS, Flanagan JR (2009c) Sensory control of object manipulation. In: Nowak DA, Hermsdörfer J (eds) *Sensorimotor Control of Grasping: Physiology and Pathophysiology*. Cambridge University Press, Cambridge, pp 141-160
- Panarese A, Edin BB, Vecchi F, Carrozza MC, Johansson RS (2009) Humans can integrate force feedback to toes in their sensorimotor control of a cybernetic hand. *IEEE Trans Neural Syst Rehabil Eng* 17: 560-567
- Arleo, A. and Nieuwenhuis, T. and Bezzi, M. and D'Errico, A. and D'Angelo, E. and Coenen, O.-J.-M. D. (2009). How synaptic release probability shapes neuronal transmission: Information theoretic analysis in a cerebellar granule cell. *Neural Computation* (Conditionally accepted)
- Brasselet, R. and Johansson, R. S. and Arleo A. (2009). Optimal context separation of spiking haptic signals by second-order somatosensory neurons. *{Advances in Neural Information Processing Systems - NIPS '09}* (Submitted)
- Brasselet, R. and Johansson, R.S. and Coenen, O. and Arleo A. (2009). Fast encoding/decoding of haptic microneurography data based on first spike latencies. *Neurocomp* 2009
- Bitzer, S. and Klanke, S. and Vijayakumar, S. (2009). Does dimensionality reduction improve the quality of motion interpolation. *European Symposium on Artificial Neural Networks*
- Saal, H. and Vijayakumar, S. and Johansson, R. S. (2009). Spatiotemporal distribution of tactile information across the human fingertip. *Proc. Sixth Forum of European Neuroscience (FENS) Geneva*

Saal, H. and Vijayakumar, S. and Johansson, R. S. (2009). Information about present and past stimulus features in human tactile afferents. *The Journal of Neuroscience* 29 (25), 8022-8031.

A Faisal and D. M Wolpert (2009). Near Optimal Combination of Sensory and Motor Uncertainty in Time During a Naturalistic Perception-Action Task. *J Neurophysiol* 101 (4), 1901--1912.

I Howard and J Ingram and D Wolpert (2009). A modular planar robotic manipulandum with end-point torque control. *J Neurosci Methods*

Arne J Nagengast and Daniel A Braun and Daniel M Wolpert (2009). Optimal control predicts human performance on objects with internal degrees of freedom. *PLoS Comput Biol* 5 (6), e1000419.

E. D'Angelo and S. K E Koekkoek and P. Lombardo and S. Solinas and E. Ros and J. Garrido and M. Schonewille and C. I. De Zeeuw (2009). Timing in the cerebellum: oscillations and resonance in the granular layer. *Neuroscience*

Egidio D'Angelo and Chris I De Zeeuw (2009). Timing and plasticity in the cerebellum: focus on the granular layer. *Trends Neurosci* 32 (1), 30--40.

Geeske M van Woerden and Freek E Hoebeek and Zhenyu Gao and Raghavendra Y Nagaraja and Casper C Hoogenraad and Steven A Kushner and Christian Hansel and Chris I De Zeeuw and Ype Elgersma (2009). betaCaMKII controls the direction of plasticity at parallel fiber-Purkinje cell synapses.. *Nat Neurosci* 12 (7), 823--825.

Peer Wulff and Martijn Schonewille and Massimiliano Renzi and Laura Viltono and Marco Sassoè-Pognetto and Aleksandra Badura and Zhenyu Gao and Freek E Hoebeek and Stijn van Dorp and William Wisden and Mark Farrant and Chris I De Zeeuw (2009). Synaptic inhibition of Purkinje cells mediates consolidation of vestibulo-cerebellar motor learning.. *Nat Neurosci*

Diwakar, S.; Magistretti, J.; Goldfarb, M.; Naldi, G. & D'Angelo, E. (2009). Axonal Na<sup>+</sup> channels ensure fast spike activation and back-propagation in cerebellar granule cells.. *J Neurophysiol* 101 519--532. This paper reports a mathematical reconstruction of the cerebellar granule cell electroresponsiveness and morphology. The model includes several voltage-dependent mechanisms that were identified in experimental recordings and models in detail their spacial distribution among the neuronal compartments. The paper yields a better understanding on the processing of spike trains operated by granule cells.

## 2008

Klanke, S. and Vijayakumar, S. and Schaal, S. (2008). A library for locally weighted projection regression. *Journal of Machine Learning Research* 9 623-626.

Bitzer, S. and Havoutis, I. and Vijayakumar, S. (2008). Synthesizing Novel Movements through Latent Space Modulation of Scalable Control Policies. *From Animals to Animats 10* Springer: 199-209.

Chai, K. M. and Williams, C. K. I. and Klanke, S. and Vijayakumar, S. (2008). Multi-task Gaussian Processing Learning of Robot Inverse Dynamics. *Advances in Neural Information Processing Systems* MIT Press:

Mitrovic, D. and Klanke, S. and Vijayakumar, S. (2008). Adaptive Optimal Control for Redundantly Actuated Arms. *From Animals to Animats 10* Springer: 93-102.

Ting, J. and Kalakrishnan, M. and Vijayakumar, S. and Schaal, S. (2008). Bayesian Kernel Shaping for Learning Control. *Advances in Neural Information Processing Systems* MIT Press

Haith, A. and Vijayakumar, S. (2008). Implications of different classes of sensorimotor

- disturbance for cerebellar-based motor learning models. *Biological Cybernetics*
- A Ahmed and Daniel M Wolpert and J. Randall Flanagan (2008). Flexible Representations of Dynamics Are Used in Object Manipulation. *Current Biology* 6.
- David W Franklin and Daniel M Wolpert (2008). Specificity of reflex adaptation for task-relevant variability. *J Neurosci* 28 (52), 14165--75.
- Ian Howard and James Ingram and Daniel M Wolpert (2008). Composition and Decomposition in Bimanual Dynamic Learning. *J Neurosci* 28 (42),10531.
- James N Ingram and Konrad P Körding and Ian S Howard and Daniel M Wolpert (2008). The statistics of natural hand movements. *Experimental brain research Experimentelle Hirnforschung Experimentation cérébrale* 188 (2), 223--36.
- R. R. Carrillo and E. Ros and C. Boucheny and O. J.-M. D. Coenen (2008). A real-time spiking cerebellum model for learning robot control. *Biosystems* 94 18-27.
- R. R. Carrillo and E. Ros and S. Tolu and T. Nieuw and E. D'Angelo (2008). Event-driven simulation of cerebellar granule cells. *Biosystems* 94 10-17.
- Michael Arbib and Giorgio Metta and Patrick van der Smagt (2008). Neurorobotics: From Vision to Action. 1453--1480.
- M. Grebenstein and P. van der Smagt (2008). Antagonism for a highly anthropomorphic hand-arm system. *Advanced Robotics* 22 (1), 39-55.
- Heiko Panzer and Oliver Eiberger and Markus Grebenstein and Peter Schaefer and Patrick van der Smagt (2008). Human motion range data optimizes anthropomorphic robotic hand-arm system design. *Proc. 9th International Conference on Motion and Vibration Control (MOVIC)*
- P. van der Smagt and G. Stillfried (2008). Using MRT data to compute a hand kinematic model. *Proc. 9th International Conference on Motion and Vibration Control (MOVIC)*
- Ruben S Van Der Giessen and Sebastiaan K Koekkoek and Stijn van Dorp and Jornt R De Gruijl and Alexander Cupido and Sara Khosrovani and Bjorn Dortland and Kerstin Wellershaus and Joachim Degen and Jim Deuchars and Elke C Fuchs and Hannah Monyer and Klaus Willecke and Marcel T G De Jeu and Chris I De Zeeuw (2008). Role of olivary electrical coupling in cerebellar motor learning.. *Neuron* 58 (4), 599--612.
- J. A. Heimel and J. M. Hermans and J-P. Sommeijer and Neuro-Bsik Mouse Phenomics consortium and C. N. Levelt (2008). Genetic control of experience-dependent plasticity in the visual cortex.. *Genes Brain Behav* 7 (8), 915--923.
- Freek E Hoebeek and Sara Khosrovani and Laurens Witter and Chris I De Zeeuw (2008). Purkinje cell input to cerebellar nuclei in tottering: ultrastructure and physiology.. *Cerebellum* 7 (4), 547--558.
- Chris I De Zeeuw and Freek E Hoebeek and Martijn Schonewille (2008). Causes and consequences of oscillations in the cerebellar cortex.. *Neuron* 58 (5), 655--658.
- D'Angelo, E. (2008). The critical role of Golgi cells in regulating spatio-temporal integration and plasticity at the cerebellum input stage.. *Front Neurosci* 2 35--46.

## 2007

- Petkos, G. and Vijayakumar, S. (2007). Load estimation and control using learned dynamics models. *IEEE International Conference on Intelligent Robots and Systems*
- Petkos, G. and Vijayakumar, S. (2007). Context estimation and learning control through latent variable extraction: from discrete to continuous contexts. *IEEE International Conference on Robotics and Automation*

Sugiyama, M. and Hachiya, H. and Towell, C. and Vijayakumar, S. (2007). Value function approximation on nonlinear manifolds for robot motor control. *IEEE International Conference on Robotics and Automation*

Edakunni, N. and Schaal, S. and Vijayakumar, S. (2007). Kernel carpentry for online regression using randomly varying coefficient model. *International Joint Conference on Artificial Intelligence*

Hospedales, T. and Cartwright, J. and Vijayakumar, S. (2007). Structure inference for Bayesian multisensory perception and tracking. *International Joint Conference on Artificial Intelligence*

Haith, A. and Vijayakumar, S. (2007). Robustness of VOR and OKR adaptation under kinematics and dynamics transformations. *IEEE International Conference on Development and Learning*

Hoffmann, H. and Petkos, G. and Bitzer, S. and Vijayakumar, S. (2007). Sensor assisted adaptive motor control under continuously varying context. *Proceedings of the International Conference on Informatics in Control, Automation and Robotics*

D Braun and Daniel M Wolpert (2007). Optimal Control: When Redundancy Matters. *Curr Biol* 17 (22), R973--R975.

Lili Tcheang and Paul M Bays and James N Ingram and Daniel M Wolpert (2007). Simultaneous bimanual dynamics are learned without interference. *Exp Brain Res* 183 (1), 17--25.

Daniel M Wolpert (2007). Probabilistic models in human sensorimotor control. *Human Movement Science* 26 (4), 511–524

R. Agis and E. Ros and J. Diaz and R. Carrillo and E. M. Ortigosa (2007). Hardware event-driven simulation engine for spiking neural networks. *International Journal of Electronics* 94 (5) 469-480.

R. R. Carrillo and E. Ros and B. Barbour and C. Boucheny and O. Coenen (2007). Event-driven simulation of neural population synchronization facilitated by electrical coupling. *Biosystems* 87 275-280.

Corina E Andreescu and Bogdan A Milojkovic and Elize D Haasdijk and Piet Kramer and Frank H De Jong and Andrée Krust and Chris I De Zeeuw and Marcel T G De Jeu (2007). Estradiol improves cerebellar memory formation by activating estrogen receptor beta.. *J Neurosci* 27 (40), 10832–10839

S. Khosrovani and R. S. Van Der Giessen and C. I. De Zeeuw and M. T G De Jeu (2007). In vivo mouse inferior olive neurons exhibit heterogeneous subthreshold oscillations and spiking patterns.. *Proc Natl Acad Sci U S A* 104 (40), 15911--15916.

Sarah Marshall and Ruben van der Giessen and Chris de Zeeuw and Eric Lang (2007). Altered olivocerebellar activity patterns in the connexin36 knockout mouse.. *Cerebellum* 1--13.

M. T. Schmolesky and M. M. De Ruyter and C. I. De Zeeuw and C. Hansel (2007). The neuropeptide corticotropin-releasing factor regulates excitatory transmission and plasticity at the climbing fibre-Purkinje cell synapse.. *Eur J Neurosci* 25 (5), 1460--1466.

Soon-Lim Shin and Freek E Hoebeek and Martijn Schonewille and Chris I De Zeeuw and Ad Aertsen and Erik De Schutter (2007). Regular patterns in cerebellar Purkinje cell simple spike trains.. *PLoS One* 2 (5), e485.

Volker Steuber and Wolfgang Mittmann and Freek E Hoebeek and R. Angus Silver and Chris I De Zeeuw and Michael Häusser and Erik De Schutter (2007). Cerebellar LTD and pattern recognition by Purkinje cells.. *Neuron* 54 (1), 121--136.

Solinas, S.; Forti, L.; Cesana, E.; Mapelli, J.; Schutter, E. D. & D'Angelo, E. (2007). Fast-Reset of Pacemaking and Theta-Frequency Resonance Patterns in Cerebellar Golgi Cells: Simulations of their Impact In Vivo.. *Front Cell Neurosci* 1 (4), This paper provides the first report of dynamic responses of Golgi cells to various time-dependent patterns and supports the electro physiological recordings with modeling to understand the underlying mechanisms. The paper shows that Golgi cells are pacemakers and resonators in the theta-frequency band, bringing along the ability to phase-reset with a period roughly equivalent to a theta cycle. The effect of noise on Golgi cell responses is evaluated.

Solinas, S.; Forti, L.; Cesana, E.; Mapelli, J.; Schutter, E. D. & D'Angelo, E. (2007). Computational reconstruction of pacemaking and intrinsic electroresponsiveness in cerebellar Golgi cells.. *Front Cell Neurosci* 1 (2), This paper reports a mathematical reconstruction of Golgi cell electroresponsiveness. The model includes several voltage-dependent mechanisms that were previously identified in experimental recordings (Forti et al., 2006). This provides the basis for simplification to be used in EDLUT simulations and large-scale realistic networks.

Mapelli, J. & D'Angelo, E. (2007). The spatial organization of long-term synaptic plasticity at the input stage of cerebellum.. *J Neurosci* 27 1285--1296. The paper demonstrates the spatio-temporal organization of granular layer excitation, inhibition and plasticity by using MEA recordings in acute cerebellar slices. The main results is the demonstration of a center-surround organization of inhibition and plasticity.

Goldfarb, M.; Schoorlemmer, J.; Williams, A.; Diwakar, S.; Wang, Q.; Huang, X.; Giza, J.; Tchetchik, D.; Kelley, K.; Vega, A.; Matthews, G.; Rossi, P.; Ornitz, D. M. & D'Angelo, E. (2007). Fibroblast growth factor homologous factors control neuronal excitability through modulation of voltage-gated sodium channels.. *Neuron* 55 449--463. This paper shows a case of cerebellar dysfunction caused by ablation of Na channel regulatory proteins, FHF1-4. The implication for cerebellar signal coding is that the inability to make spike bursts in granule cells determines dramatic consequences for cerebellar computation and for sensory-motor behaviour.

Govaerts LC, Smit AE, Saris JJ, VanderWerf F, Willemsen R, Bakker CE, De Zeeuw CI, Oostra BA (2007) Exceptional good cognitive and phenotypic profile in a male carrying a mosaic mutation in the FMR1 gene. *Clin Genet*. Aug;72(2):138-44

van Hagen JM, van der Geest JN, van der Giessen RS, Lagers-van Haselen GC, Eussen HJ, Gille JJ, Govaerts LC, Wouters CH, de Coo IF, Hoogenraad CC, Koekkoek SK, Frens MA, van Camp N, van der Linden A, Jansweijer MC, Thorgeirsson SS, De Zeeuw CI (2007) Contribution of CYLN2 and GTF2IRD1 to neurological and cognitive symptoms in Williams Syndrome. *Neurobiol Dis* Apr;26(1):112-24

## 2006

E. Ros and R. Carrillo and E. M. Ortigosa and B. Barbour and R. Agis (2006). Event-driven simulation scheme for spiking neural networks using look-up tables to characterize neuronal dynamics. *Neural Computation* 18 (12) 2959-2993.

E. Ros and E. M. Ortigosa and R. Agis and M. Arnold and R. Carrillo (2006). Real time computing platform for spiking neurons (RT-Spike). *IEEE Transactions on Neural Networks* 17 (4) 1050-1063.

Nadja Van Camp and Marleen Verhoye and Chris I De Zeeuw and Annemie Van der Linden (2006). Light stimulus frequency dependence of activity in the rat visual system as studied with high-resolution BOLD fMRI.. *J Neurophysiol* 95 (5), 3164--3170.

M. Faulstich and A. M. van Alphen and C. Luo and S. du Lac and C. I. De Zeeuw (2006). Oculomotor plasticity during vestibular compensation does not depend on cerebellar LTD.. *J Neurophysiol* 96 (3), 1187–11

Ruben S Van Der Giessen and Stephan Maxeiner and Pim J French and Klaus Willecke and Chris I De Zeeuw (2006). Spatiotemporal distribution of Connexin45 in the olivocerebellar system.. *J Comp Neurol* 495 (2), 173--184.

Christian Hansel and Marcel de Jeu and Amor Belmeguenai and Simone H Houtman and Gabriëlle H S Buitendijk and Dmitri Andreev and Chris I De Zeeuw and Ype Elgersma (2006). alphaCaMKII is essential for cerebellar LTD and motor learning.. *Neuron* 51 (6), 835--843.

Inger Montfoort and Willem P A Kelders and Jos N van der Geest and Inger B Schipper and Louw Feenstra and Chris I de Zeeuw and Maarten A Frens (2006). Interaction between ocular stabilization reflexes in patients with whiplash injury.. *Invest Ophthalmol Vis Sci* 47 (7), 2881--2884.

Martijn M de Ruiter and Chris I De Zeeuw and Christian Hansel (2006). Voltage-gated sodium channels in cerebellar Purkinje cells of mormyrid fish.. *J Neurophysiol* 96 (1), 378--390.

Martijn Schonewille and Sara Khosrovani and Beerend H J Winkelman and Freek E Hoebeek and Marcel T G De Jeu and Inger M Larsen and J. Van der Burg and Matthew T Schmolesky and Maarten A Frens and Chris I De Zeeuw (2006). Purkinje cells in awake behaving animals operate at the upstate membrane potential.. *Nat Neurosci* 9 (4), 459--61; author reply 461

Martijn Schonewille and Chongde Luo and Tom J H Ruigrok and Jan Voogd and Matthew T Schmolesky and Mandy Rutteman and Freek E Hoebeek and Marcel T G De Jeu and Chris I De Zeeuw (2006). Zonal organization of the mouse flocculus: physiology, input, and output.. *J Comp Neurol* 497 (4), 670--682.

Albertine Ellen Smit and Pierre Buisseret and Catherine Buisseret-Delmas and Chris Innocentius De Zeeuw and Frans VanderWerf and Fawzia Zerari-Mailly (2006). Reticulo-collicular and spino-collicular projections involved in eye and eyelid movements during the blink reflex.. *Neurosci Res* 56 (4), 363–371

John S Stahl and Robert A James and Brian S Oommen and Freek E Hoebeek and Chris I De Zeeuw (2006). Eye movements of the murine P/Q calcium channel mutant tottering, and the impact of aging.. *J Neurophysiol* 95 (3), 1588--1607.

Offenhäuser, N.; Castelletti, D.; Mapelli, L.; Soppo, B. E.; Regondi, M. C.; Rossi, P.; D'Angelo, E.; Frassoni, C.; Amadeo, A.; Tocchetti, A.; Pozzi, B.; Disanza, A.; Guarnieri, D.; Betsholtz, C.; Scita, G.; Heberlein, U. & Fiore, P. P. D. (2006). Increased ethanol resistance and consumption in Eps8 knockout mice correlates with altered actin dynamics.. *Cell* 127 213--226. This paper shows a case in which cerebellar dysfunction caused by alcohol intoxication is prevented by knock-out of a sub-synaptic protein, EPS8. The mechanisms involve NMDA receptor regulation and its implications for sensory-motor adaptation.

van de Ven M, Andressoo JO, Holcomb VB, von Lindern M, Jong WM, De Zeeuw CI, Suh Y, Hasty P, Hoeijmakers JH, van der Horst GT, Mitchell JR (2006) Adaptive stress response in segmental progeria resembles long-lived dwarfism and calorie restriction in mice. *PLoS Genet*. Dec 15;2(12):e192 Erratum in: *PLoS Genet*. 2008 Oct;4(10)

Smit AE, Buisseret P, Buisseret-Delmas C, De Zeeuw CI, VanderWerf F, Zerari-Mailly F (2006) Reticulo-collicular and spino-collicular projections involved in eye and eyelid movements during the blink reflex. *Neurosci Res*. Dec;56(4):363-71.

## Exploitation

Smagt van der P. (2008). Taktiler Flächensensor, Patent Germany: 10 2006 016 661.

Smagt van der P., Strohmayer M., and Harms A. (2008). Aufnehmer zur Erfassung von Biopotentialen.

Strohmayer M., Smagt van der P., and Krampe E. (2008). Taktiler Flächensensor, Patent Germany: 10 2007 020 131.

DLR: German Patent 10 2006 016 662.0 "taktiler Flächensensor"

DLR: German Patent 10 2006 016 661.2 "taktiler Flächensensor" (sensorischer Garn)

DLR: "Taktiler Flächensensor: Partikelbahnen", German Patent 10 2007 020 131.3

DLR: "Dynamische Schiene", German Patent 10 2007 012 410.6-51

DLR: "Antagonistische Schwenkvorrichtung", German patent 10 2006 016 958 A1

ALTJIRA: US patent: "Applications of an algorithm that mimics cortical processing"